


七 田 電 治

波 多 野 財

久 野 曉

セメント原料マローの粘度について (第3組)

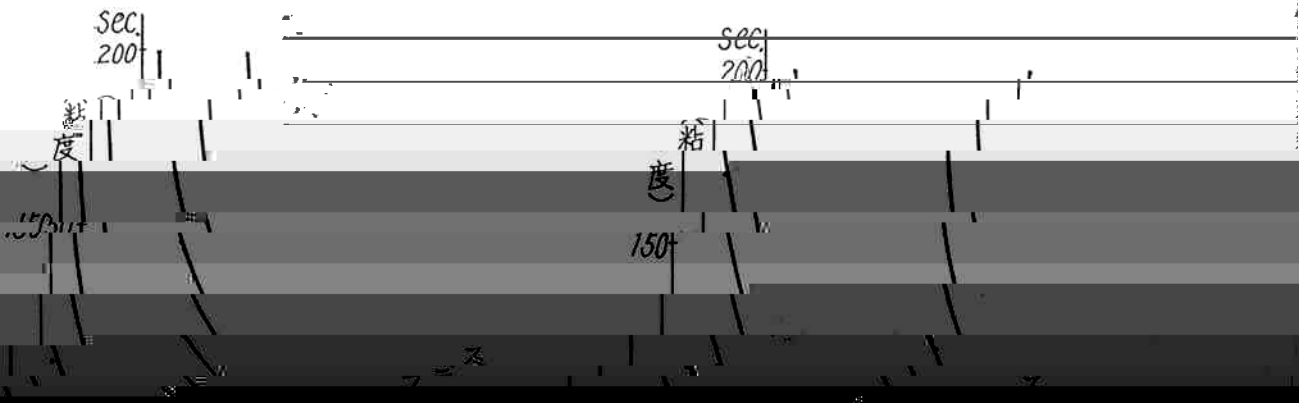


2.0%  
S.W.L.

0.1

0.1

0.2%  
テルク-B

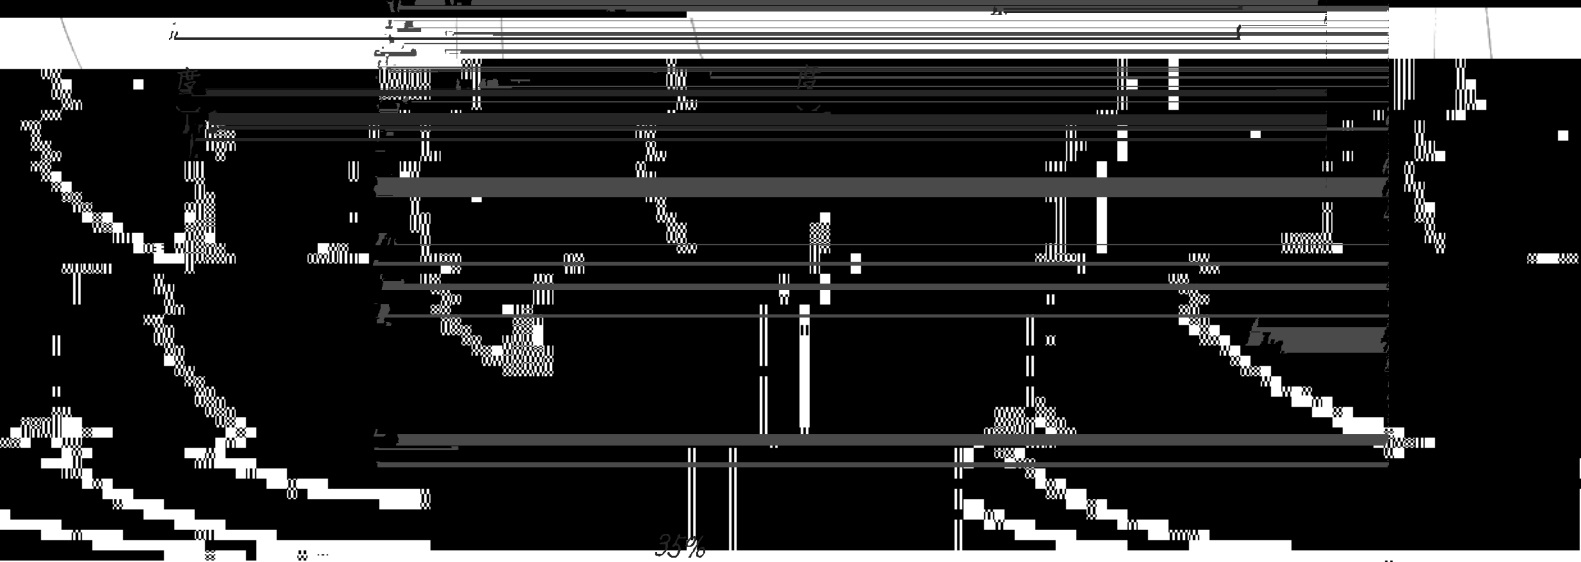

35%

35%

38%

40%

38%

40%

0.1

0.1

0.1




セメント原料スラリーの粘度について (第3報)

500  
100  
(粘度)


500  
(粘度)

スラリー水分

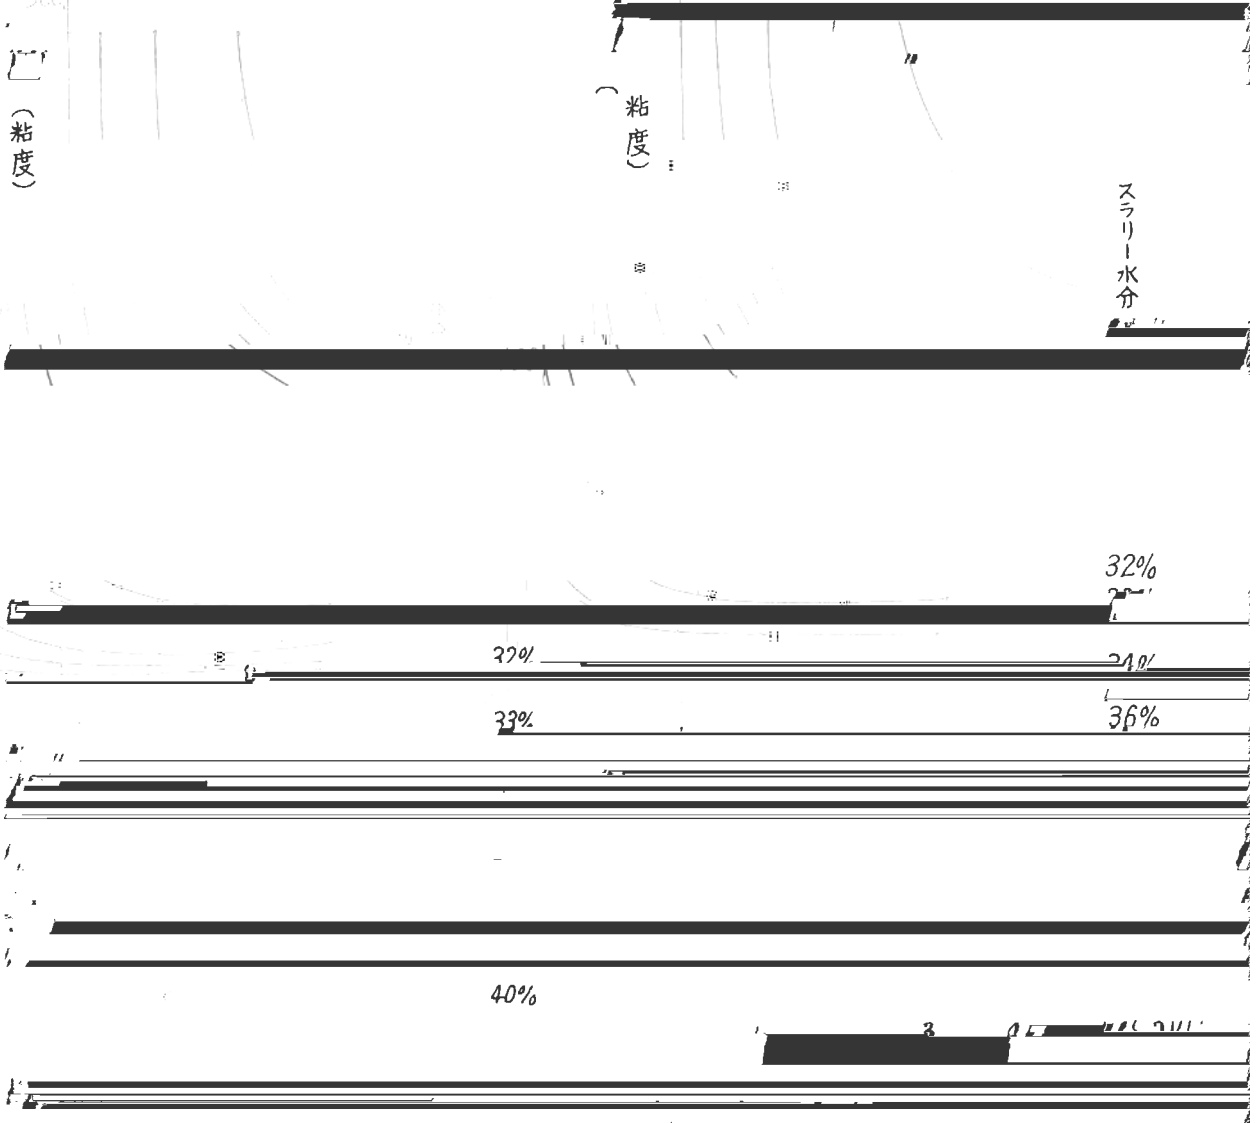

セメント原料

[REDACTED]

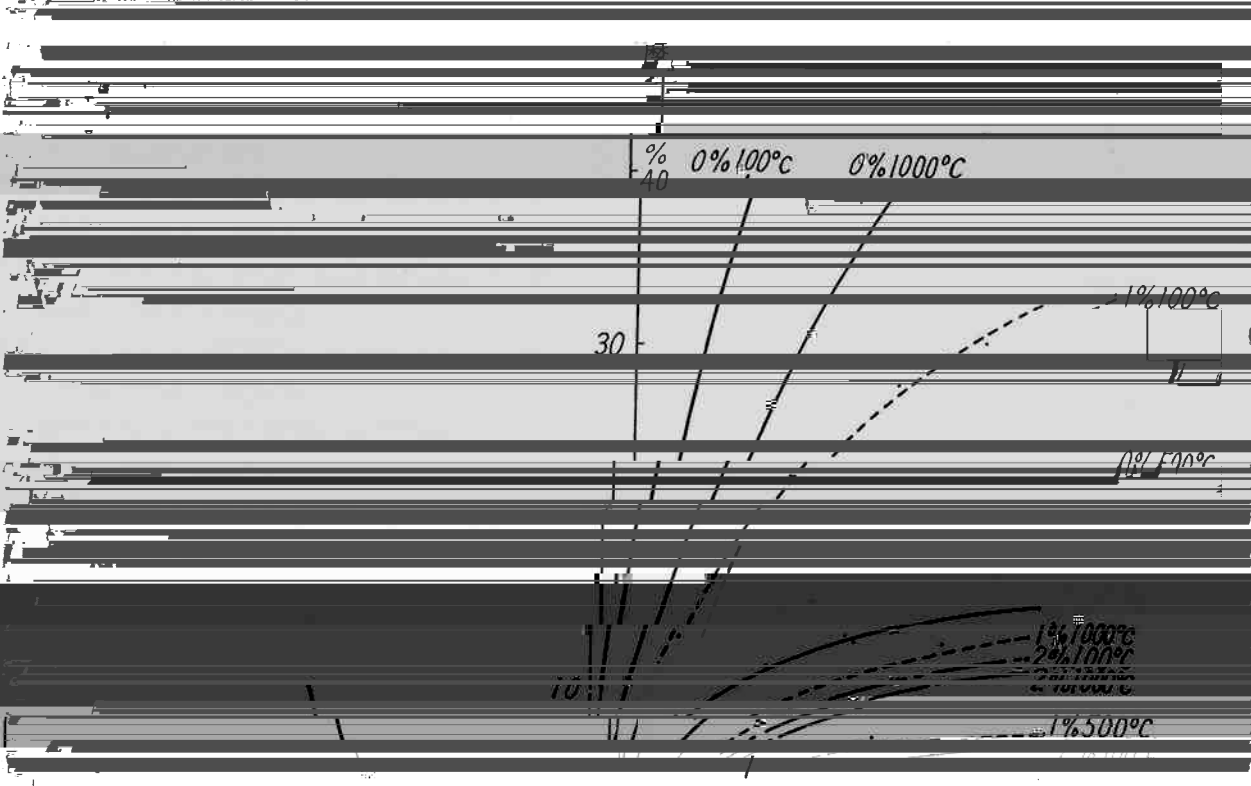

[REDACTED]

4 5% SWL.

[REDACTED]

7540 100

