

71 D-7-000-11-0000-0000

腐蝕防止の材料


山本 井

藤 正 美

山  
本  
井

Studies on Corrosion-resistant Material for ...


山本 井

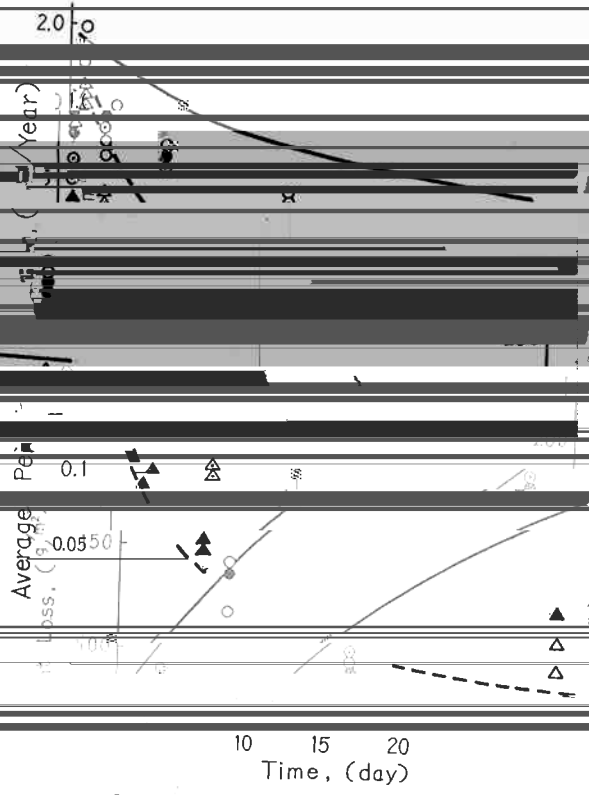


4. 試験温度

常温

1. 純 Pb

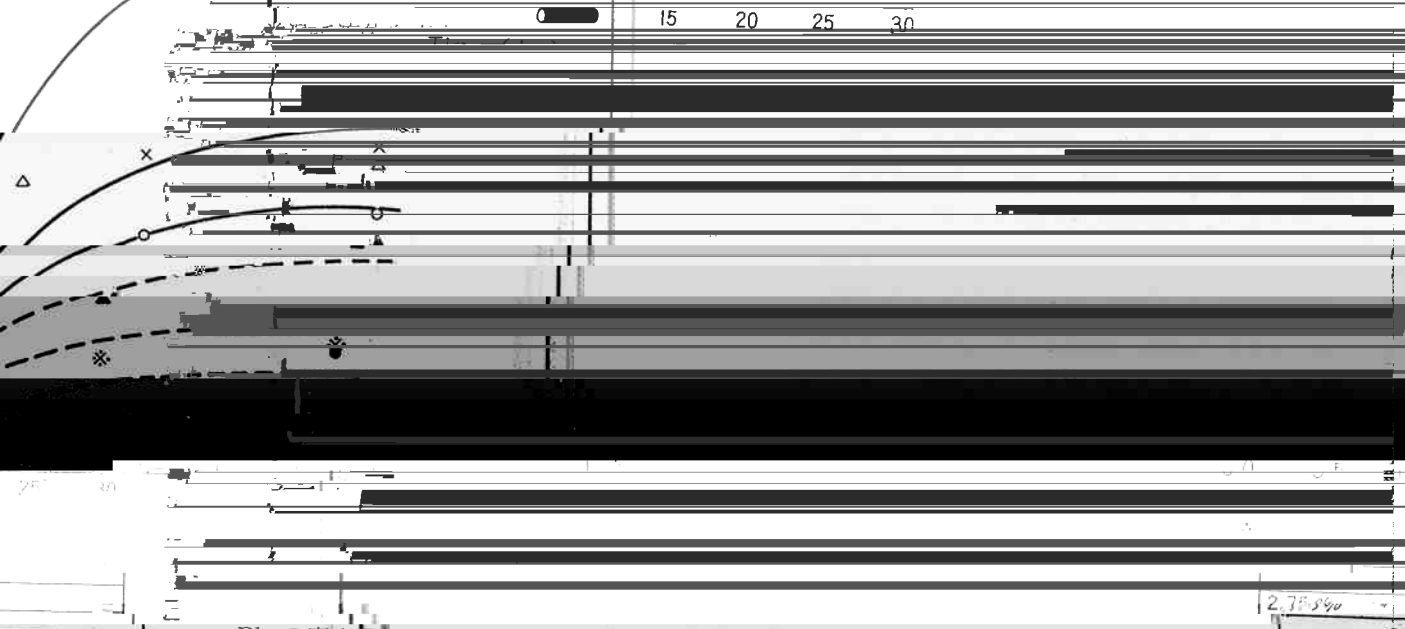

2.75%

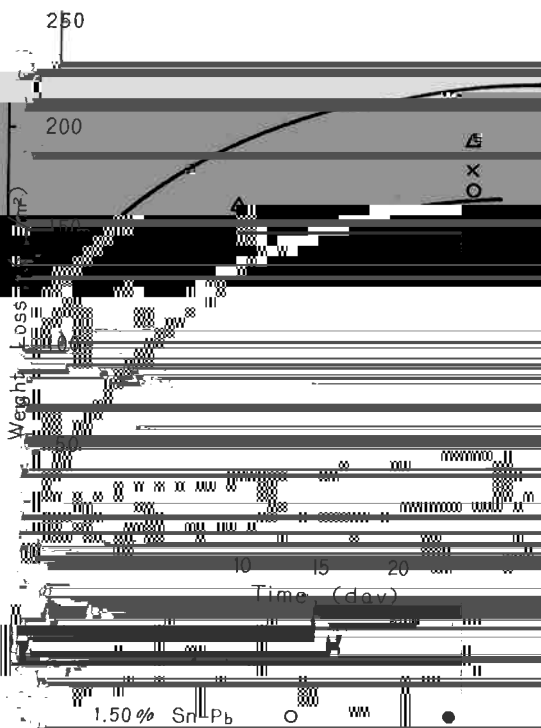

250

Weight Loss (%)

5 10 15 20



0

陽極酸化条件 (17% H<sub>2</sub>SO<sub>4</sub>, 0.16mA/cm<sup>2</sup>, 48hr.)

15

30




陽極酸化条件 (17% H<sub>2</sub>SO<sub>4</sub>, 0.16mA/cm<sup>2</sup>, 48hr.)

陽極酸化条件 (17% H<sub>2</sub>SO<sub>4</sub>, 0.16mA/cm<sup>2</sup>, 48hr.)

3

7

15

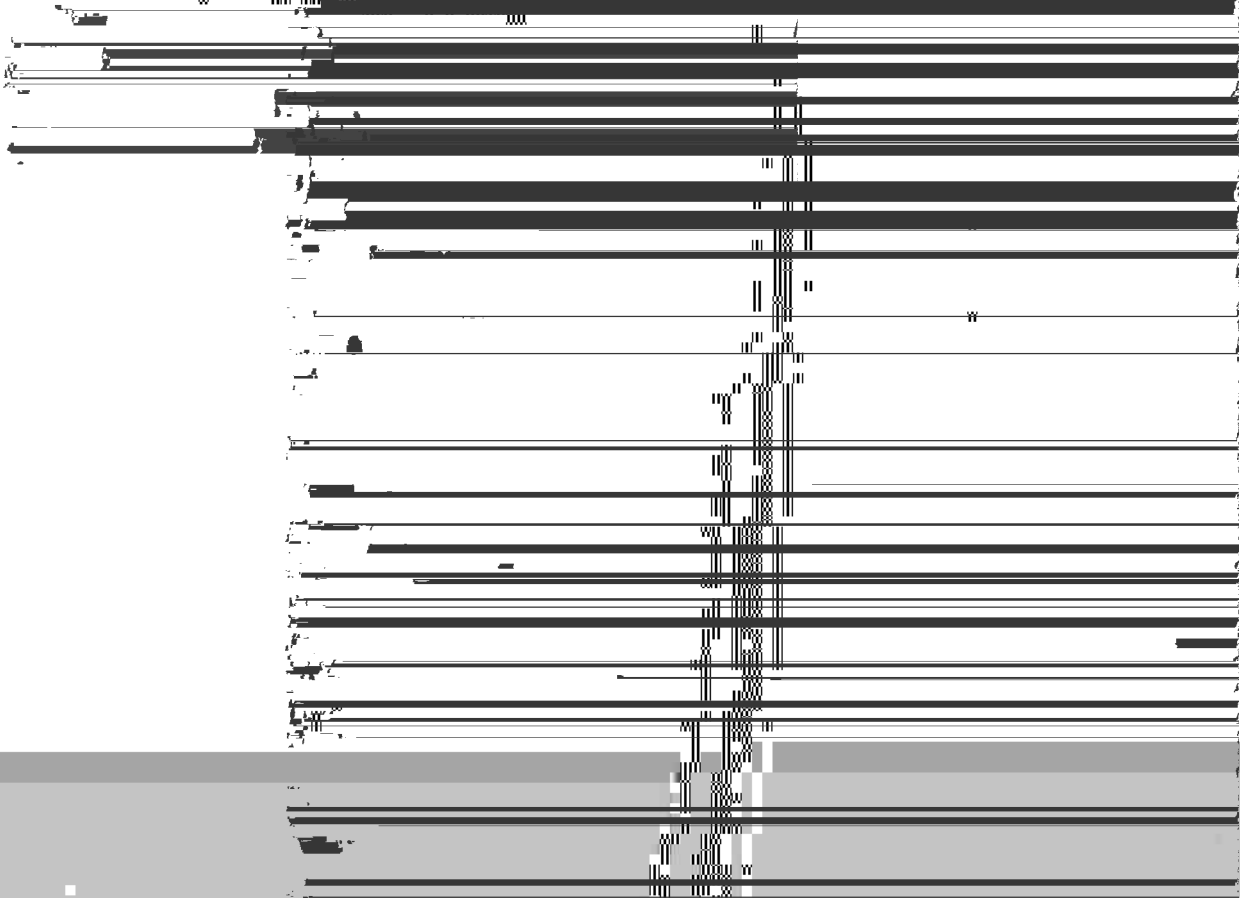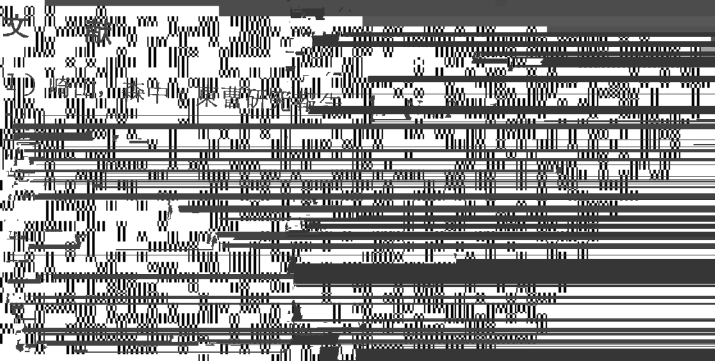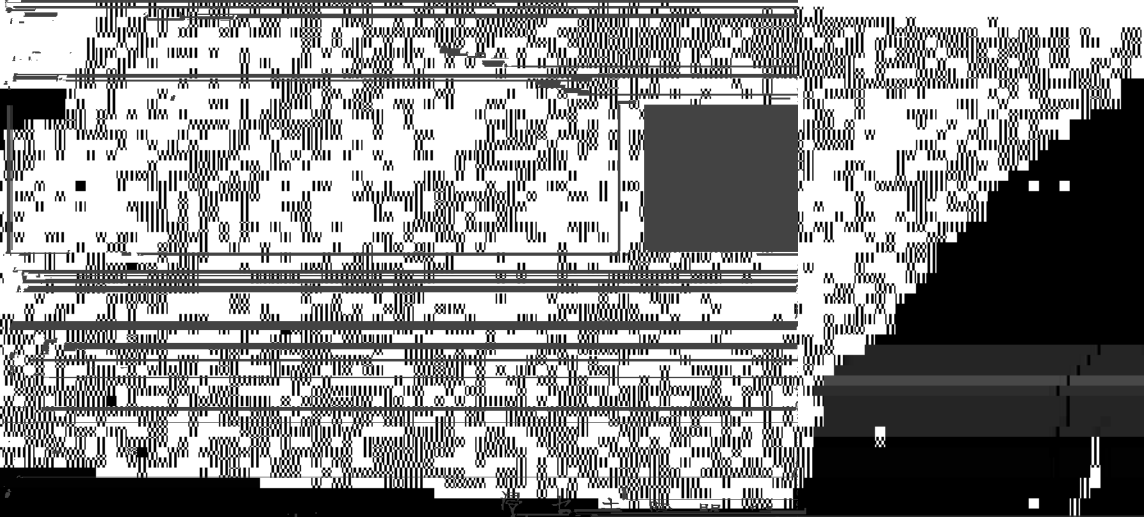

文

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40