

JDC 54E 3 - 54C 107

Various Japanese ...

相 潤 情

木 利



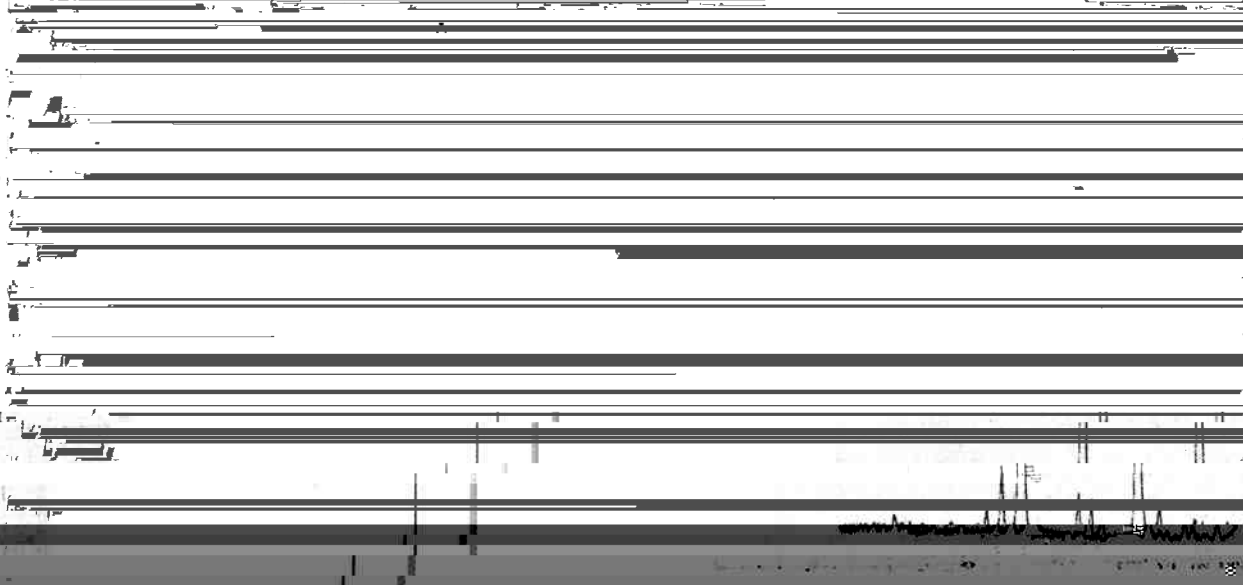



写真 1



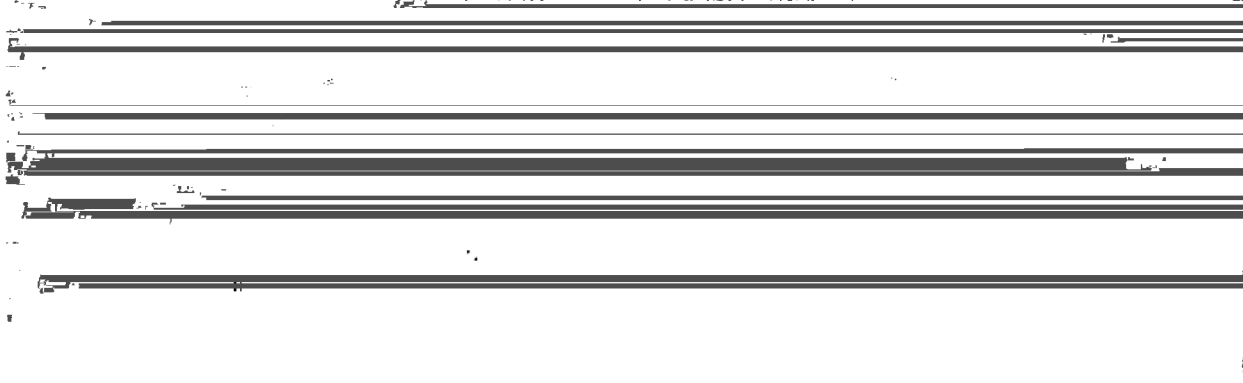

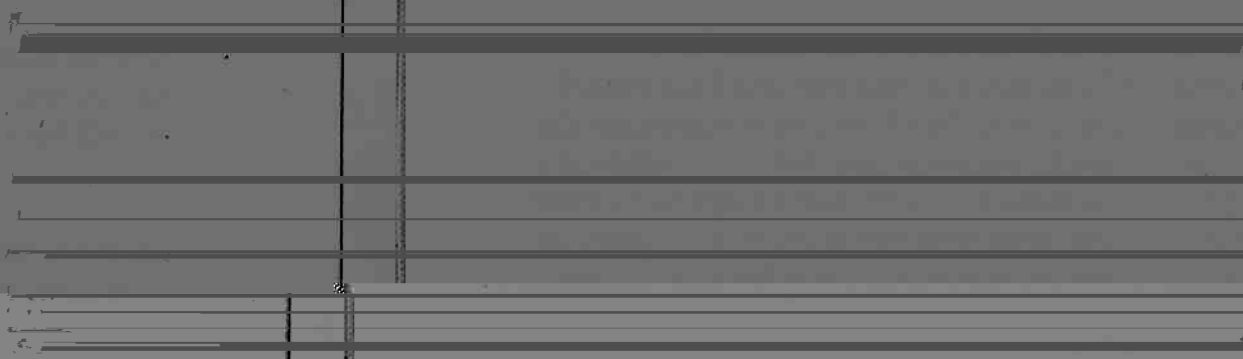


Na<sub>2</sub>CO<sub>3</sub> 与 Na<sub>2</sub>PO<sub>3</sub>F 的 质量 比

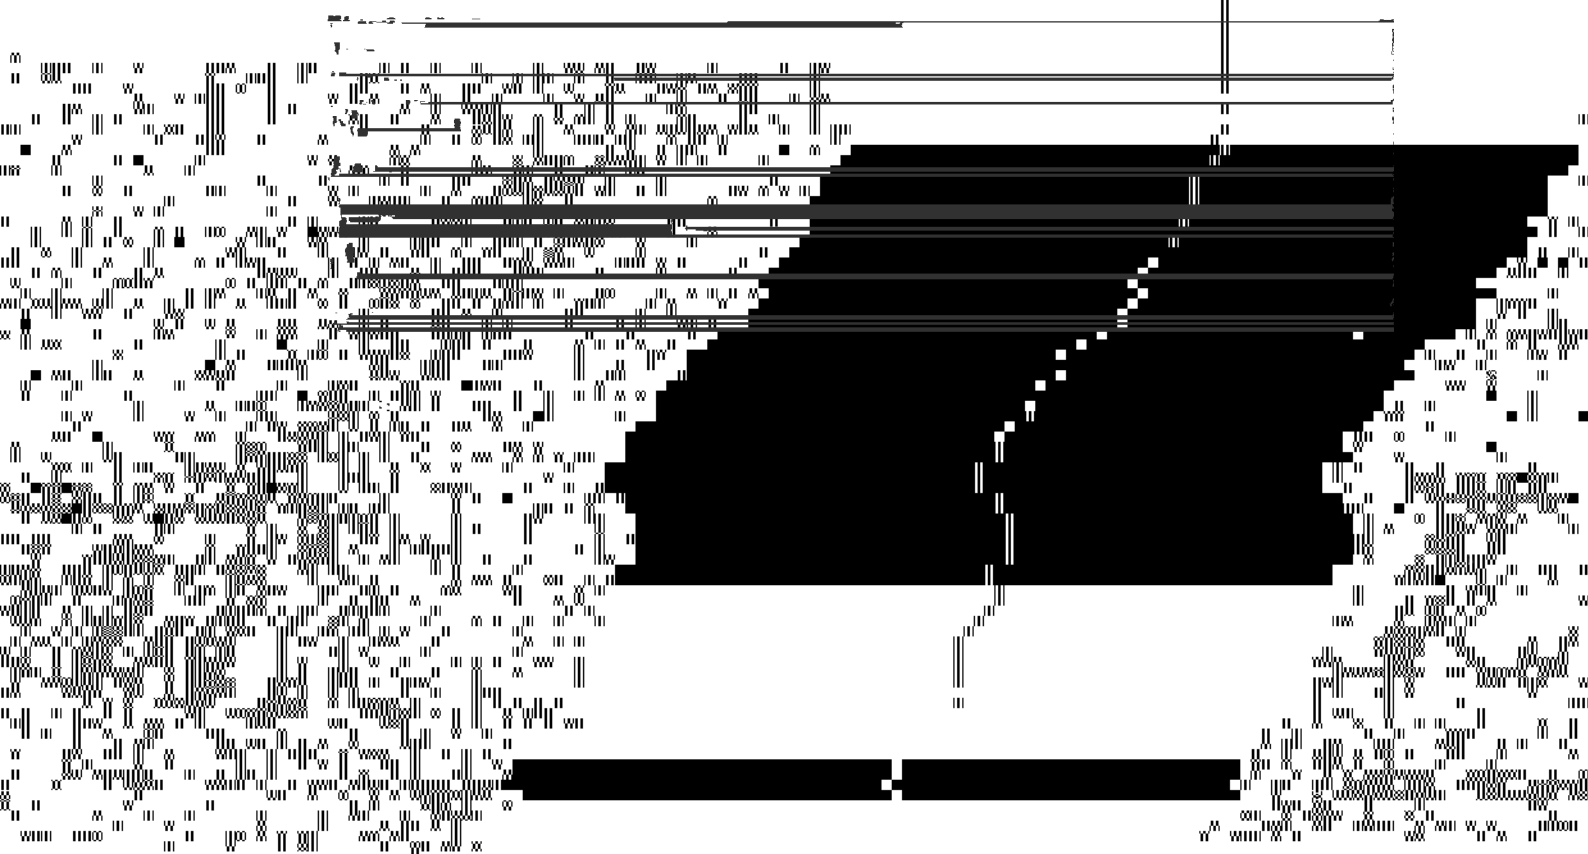

に対する強度比

MPO.1

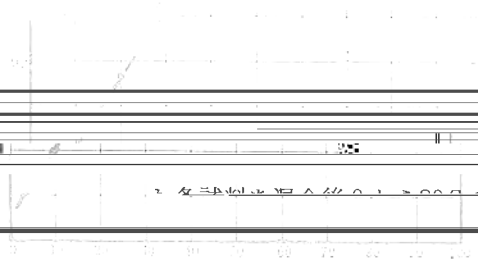

1

2


3

5

0.0636

0.4856

0.486

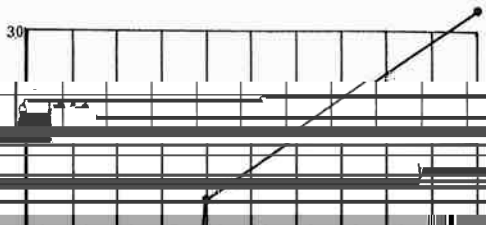

min | I/MgOI gO I

Table 5. 1733時間の確度0.08に与える影響

粉碎時	$\text{Na}_4\text{P}_2\text{O}_7$	$\text{Na}_4\text{P}_2\text{O}_7$
I/M	I/M	I/M

(自動計数装置を用いた)

間 |  $\text{Na}_5\text{P}_3\text{O}_{10}$



1)



13

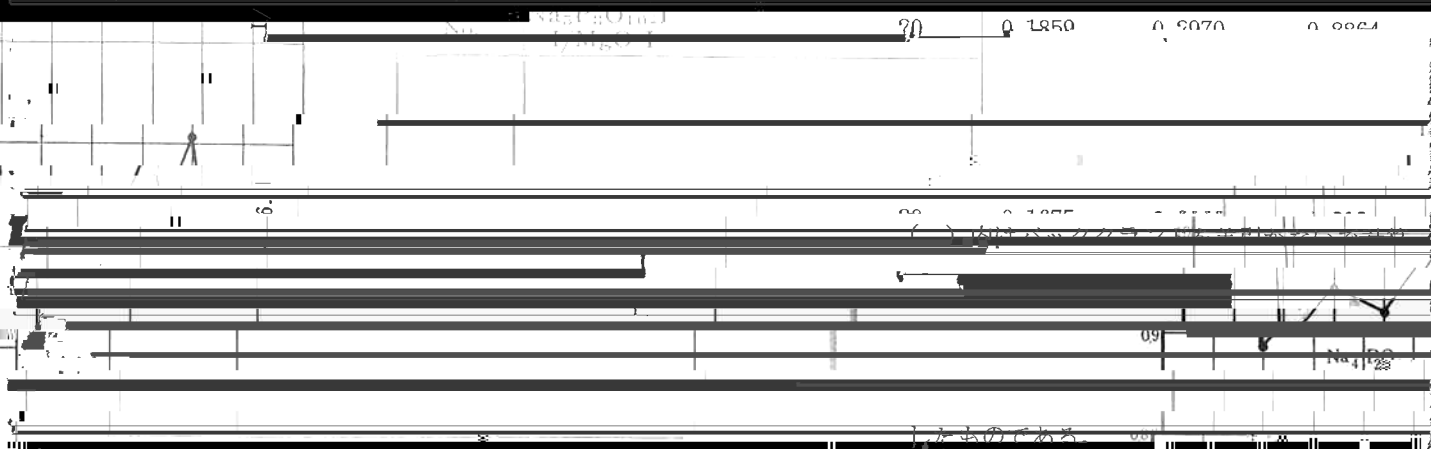


Table 6. 試料の結晶の大きさによる強度係数

与える影響





場合 1. 2. 3. 4. 5. の とき と ほとんど 直線 で バラツキ あり

741 (1975)



Fig. 1, 2, 4, 5. の とき と ほとんど 直線 で バラツキ あり