

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]




UE 760 65 0.97 40





Property	MI.	λ	V.Aic.	
Grade	(g/10 min)	(μ /cc)	content(%)	
UE 710	18	0.950	28	
HR 624	4	0.949	26	

十二 前日紙に用いたのEVAとHMAで

UE 681	350	0.936	20	
UE 680	150	0.936	20	
HR 632	20	0.941	20	

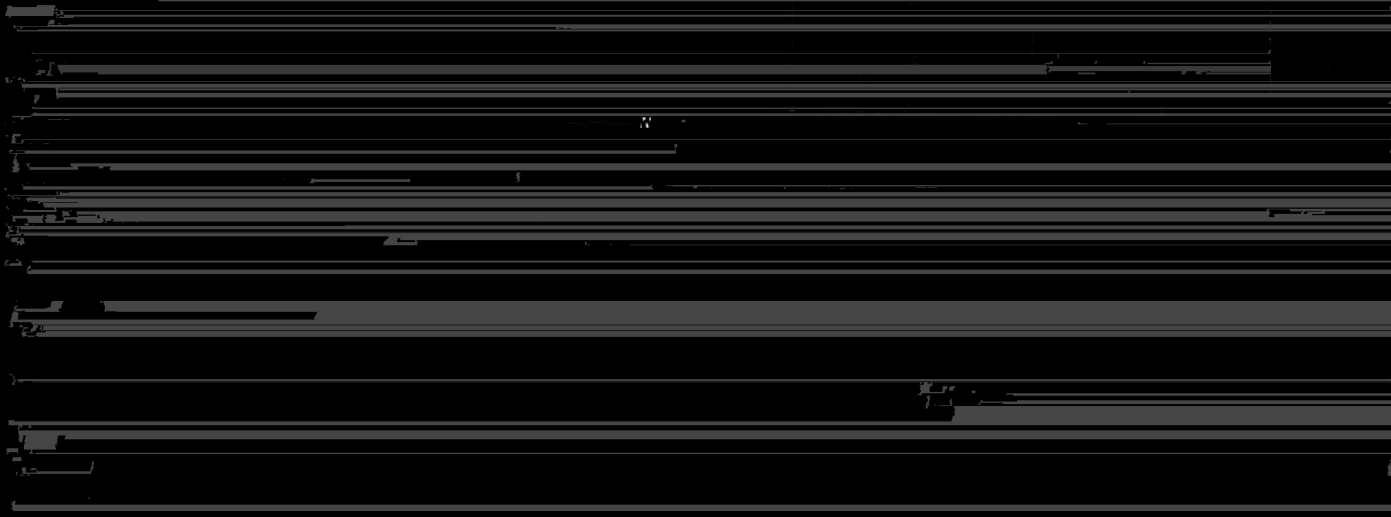

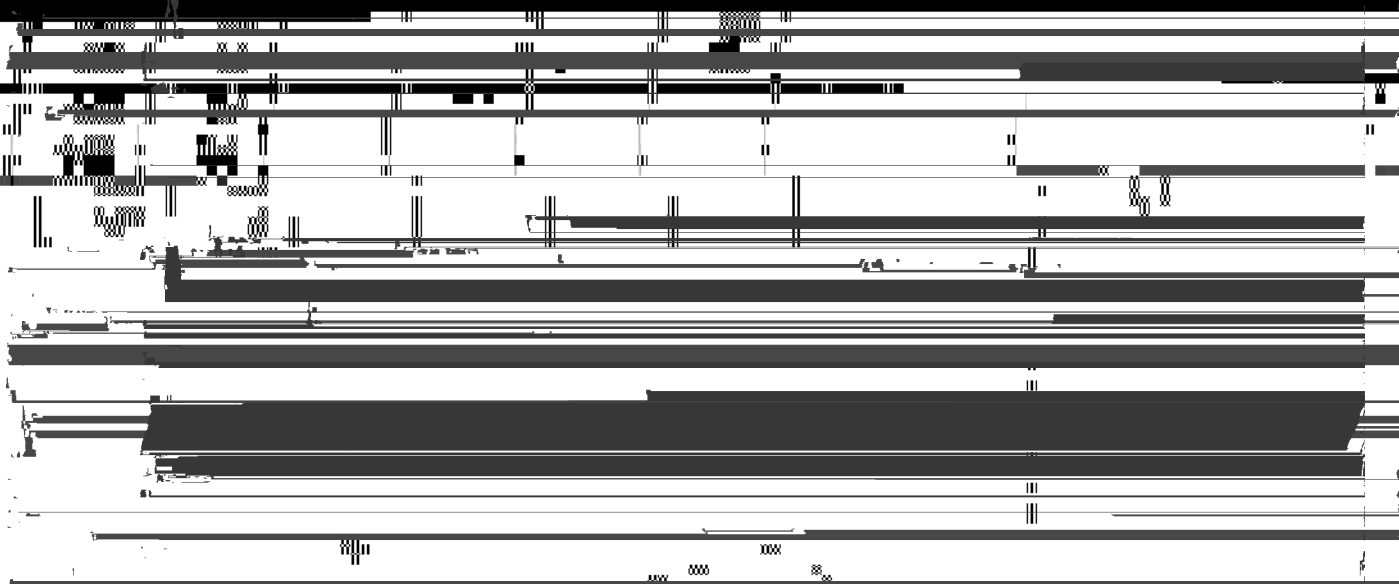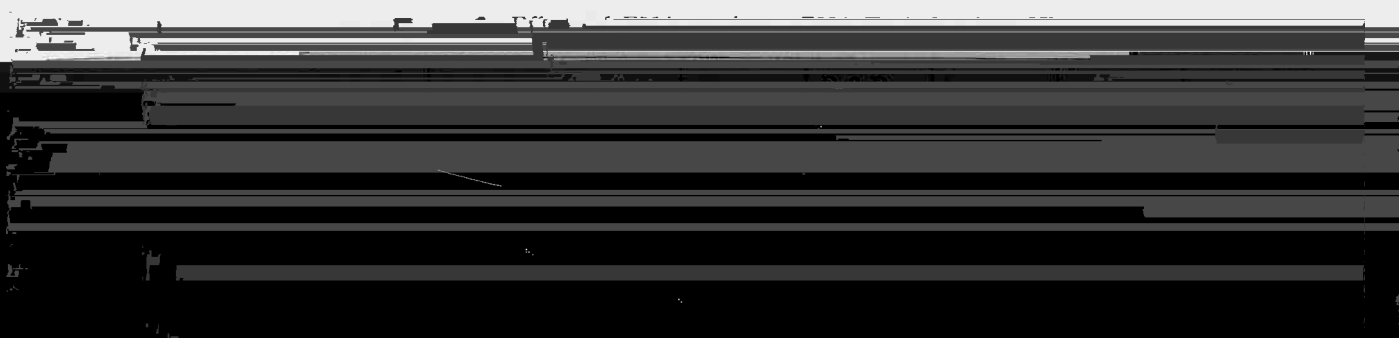

73.0	37.0	815
79.0	54.4	
91.0	89.0	
98.0	105.0	

UB 760	14,400	23
UB 750	15,500	49

||
||
||

MI 20
MI 65

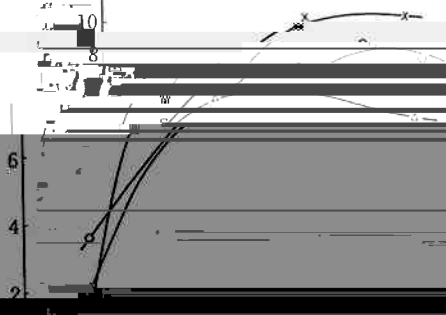


Table 2 Comparison with Various Tackifiers on EVA-Tackifier line HMA

MI 20 MI 65 MI 100


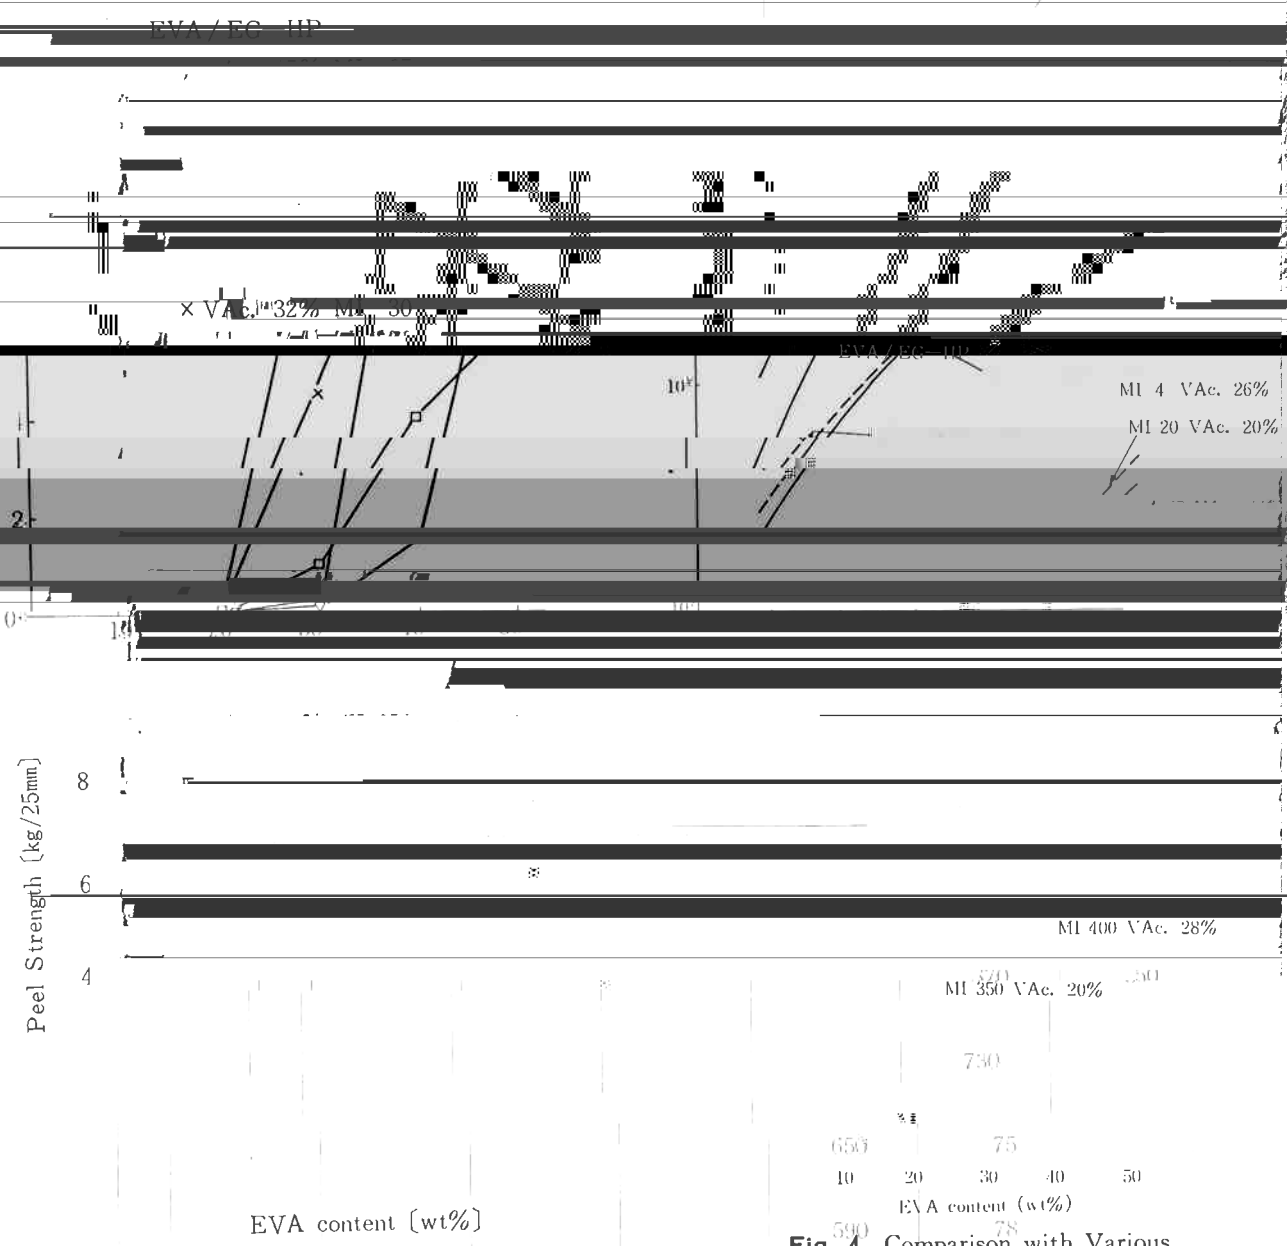


Fig. 4 Comparison with Various Tackifiers on EVA-Tac

EG-HP
HM-2050
IIR 720

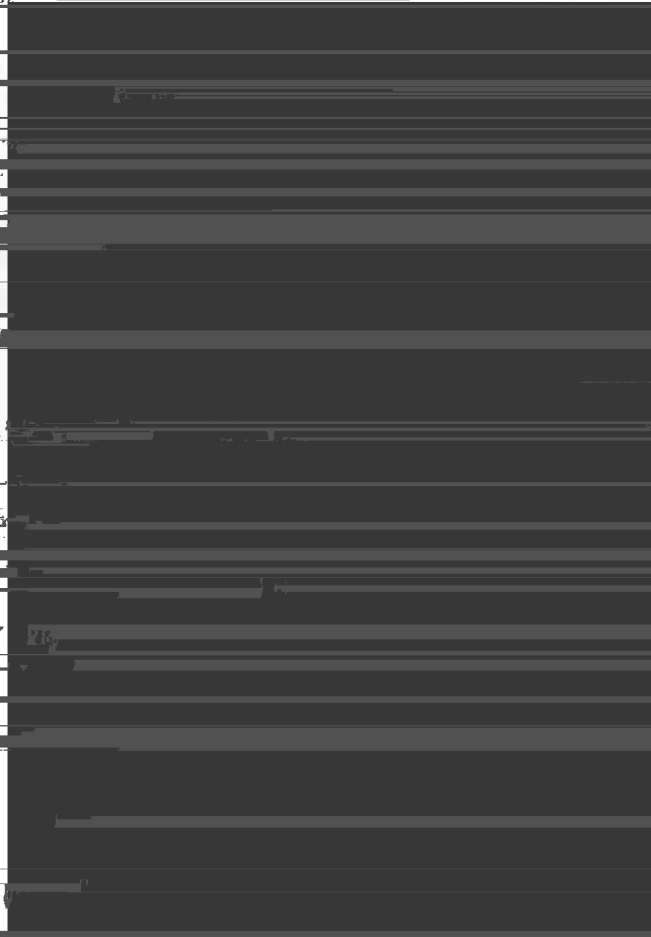

[Faint, mostly illegible text on the right side of the page, possibly bleed-through from the reverse side.]

[Faint, mostly illegible text at the bottom of the page, possibly bleed-through from the reverse side.]