

[Redacted text block]

[Redacted text block]

[Redacted text block]

小池知一
四廿五

[Redacted text block]

[Redacted text block]

坂井直道

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]


[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

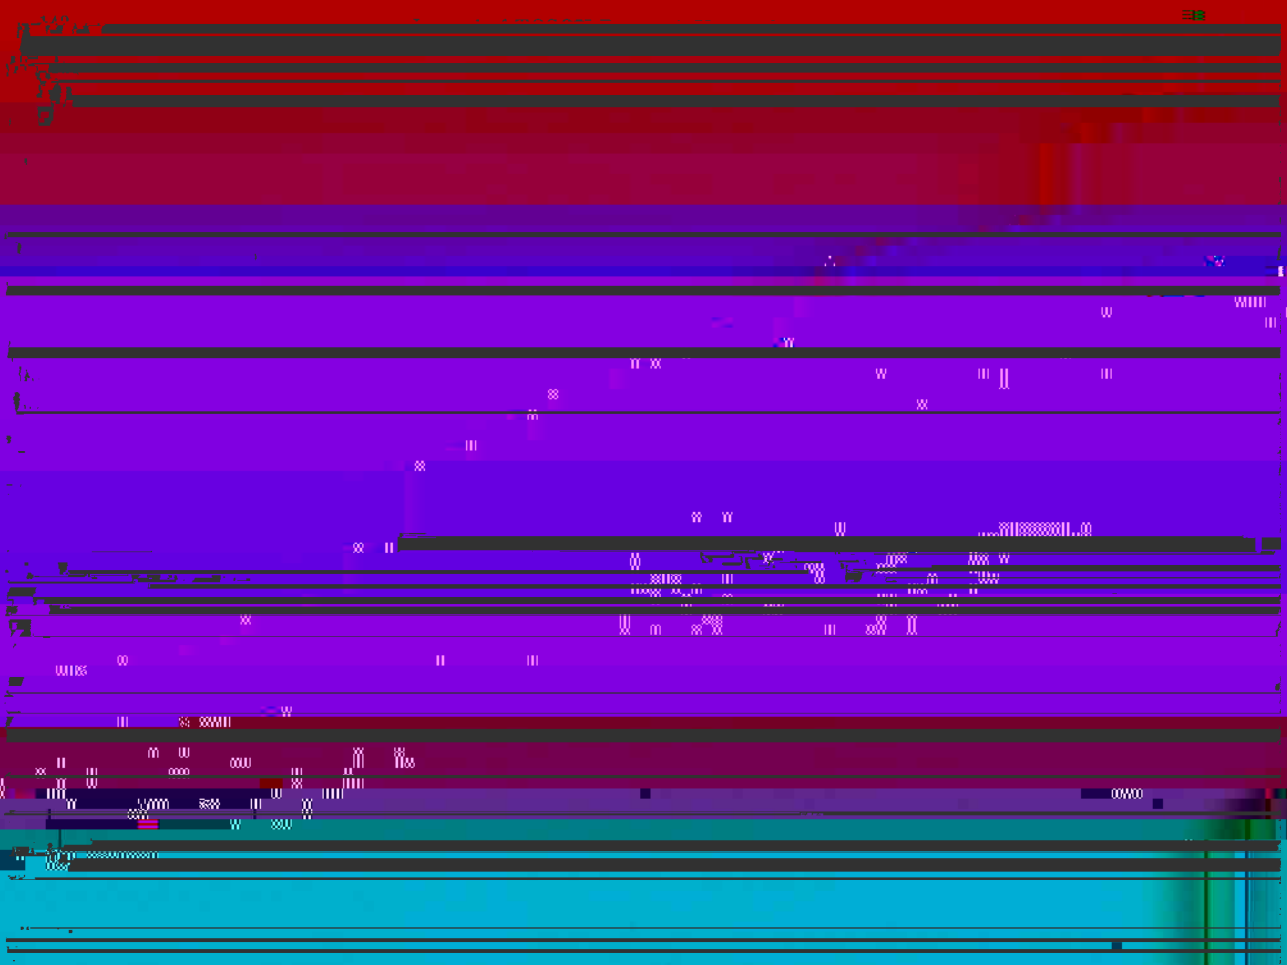

extend

に、印加電圧は同じ量の変位を得るのには1/2でよいと

となる。

パズル刑の場合の変位長を与える関係式については

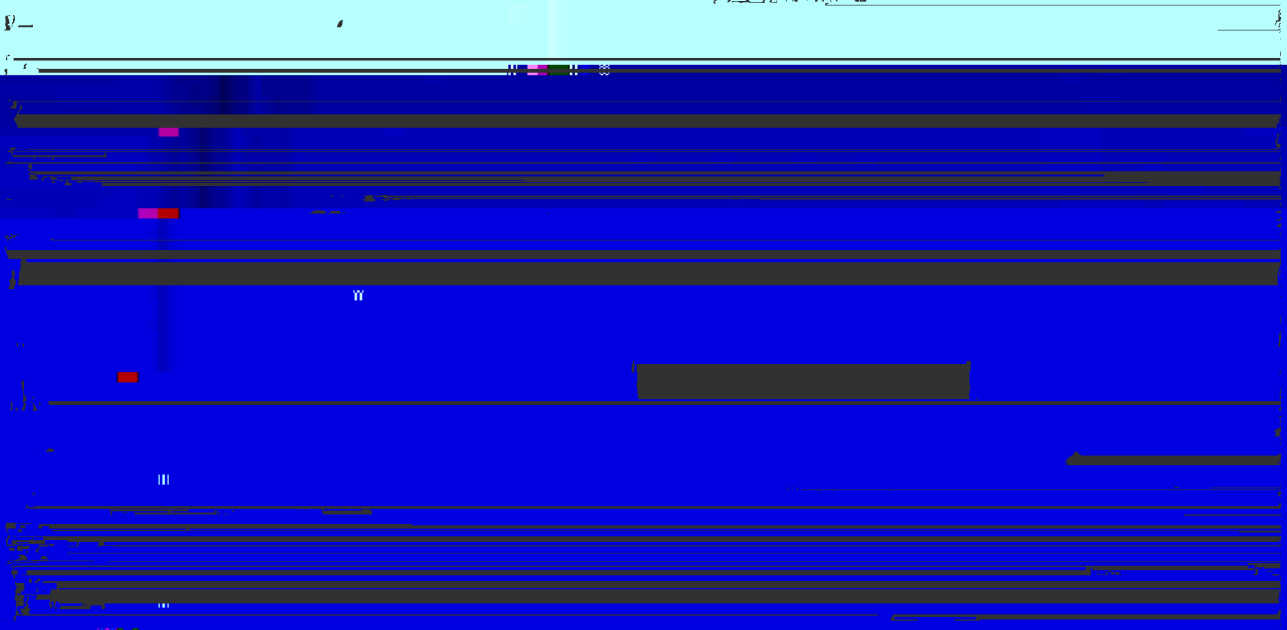


Table 1. Piezoelectric constants of ceramics for the

bimorph.

Relative $\epsilon_{33} T / \epsilon_0$ 4400 2200

Dielectric constant

Dielectric $\tan \delta$ (%)


1.4 1.4

Loss

0.25 0.27

Cast into

Cast into

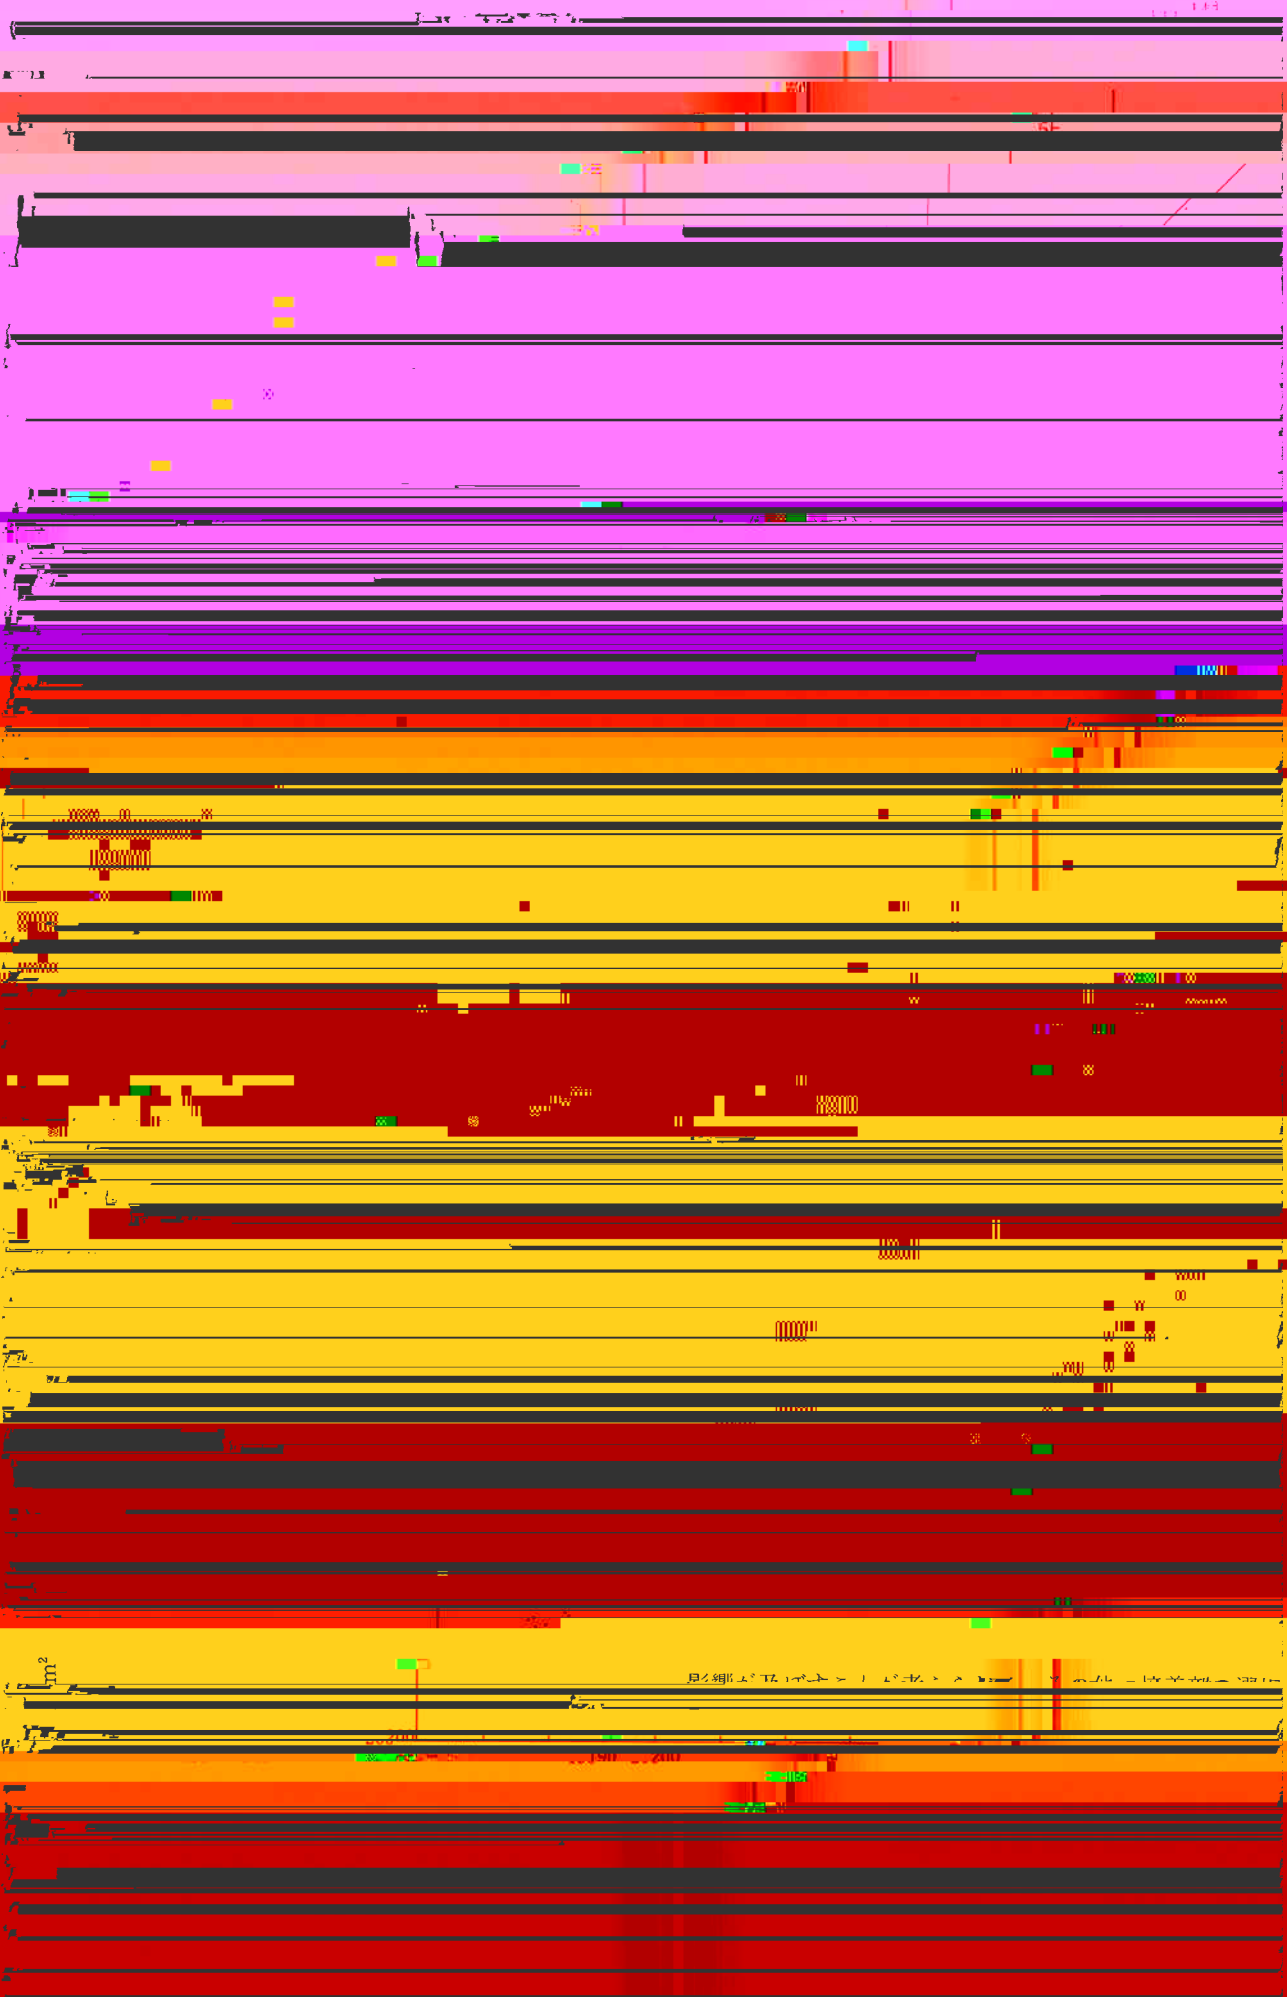


Technical drawing of a shaft assembly, showing dimensions and components. The drawing includes a scale bar at the bottom.


TBA-12-R 算1.か変位量の1.9倍にも達していることの原因として、




右図に示すように、この時は、おきかたが、おきのし、おきの

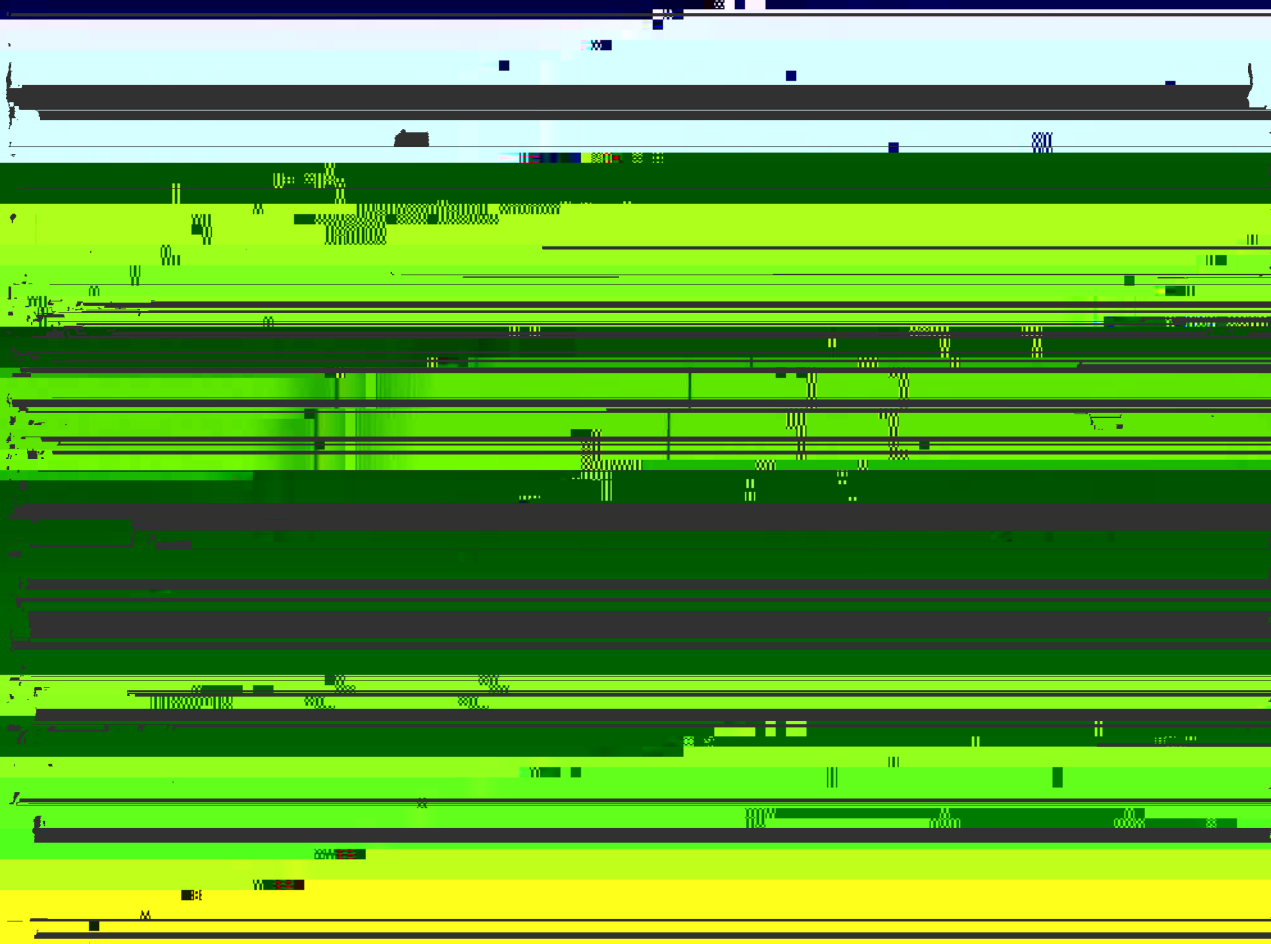

1:75 000 scale map. The map shows the location of the study area in the north-eastern part of the country.

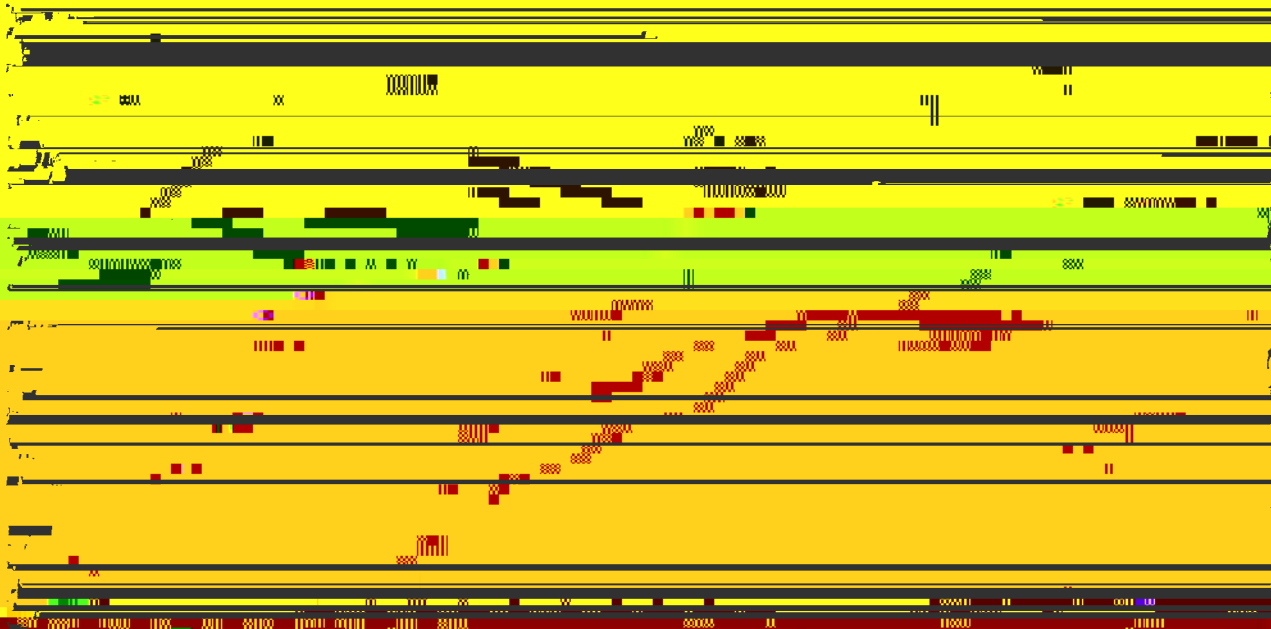

1:75 000 scale map. The map shows the location of the study area in the north-eastern part of the country.

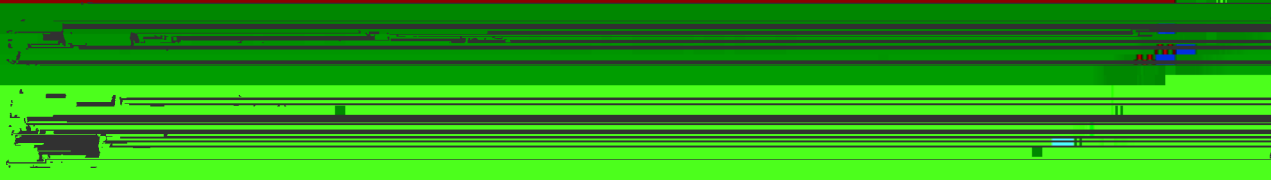


1:75 000 scale map. The map shows the location of the study area in the north-eastern part of the country.

120-

BR-11"

supnt

20 1950

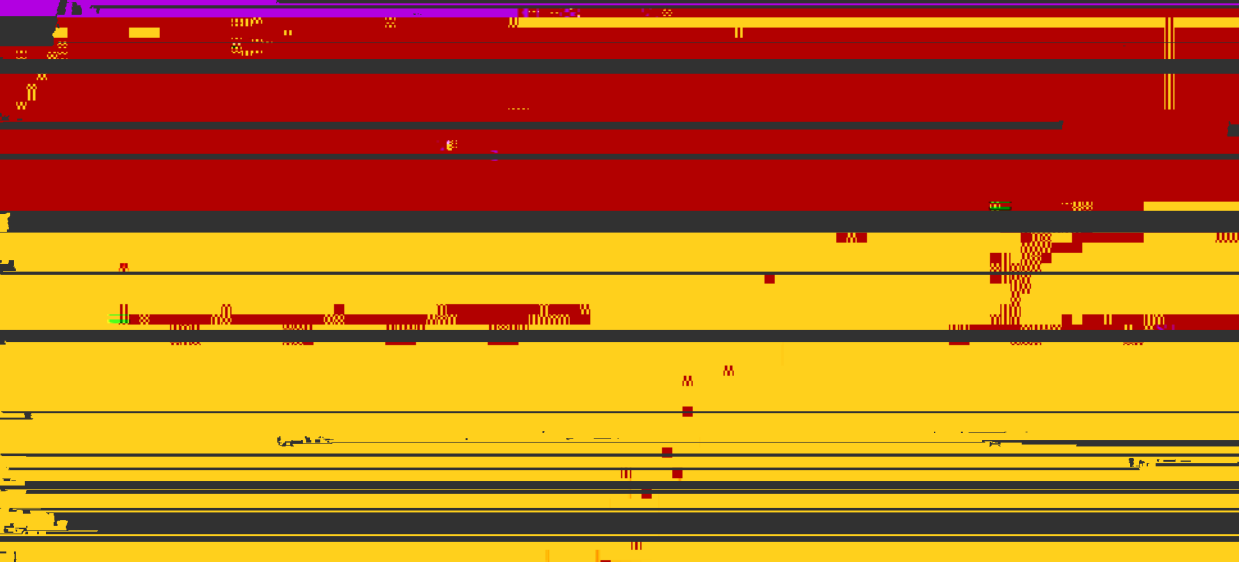

M M

Exp. No. 10

10

11

