

Ni/Al

MANUFACTURING OF ...

Fig. 1 Cross-sectional view of DT panel





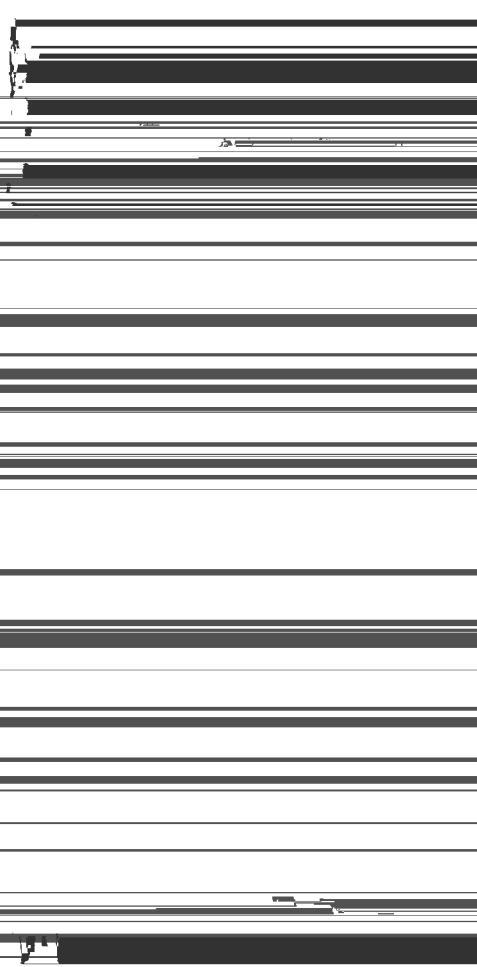


Fig.

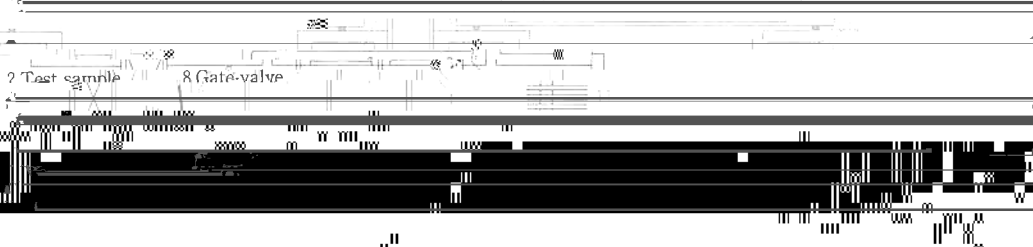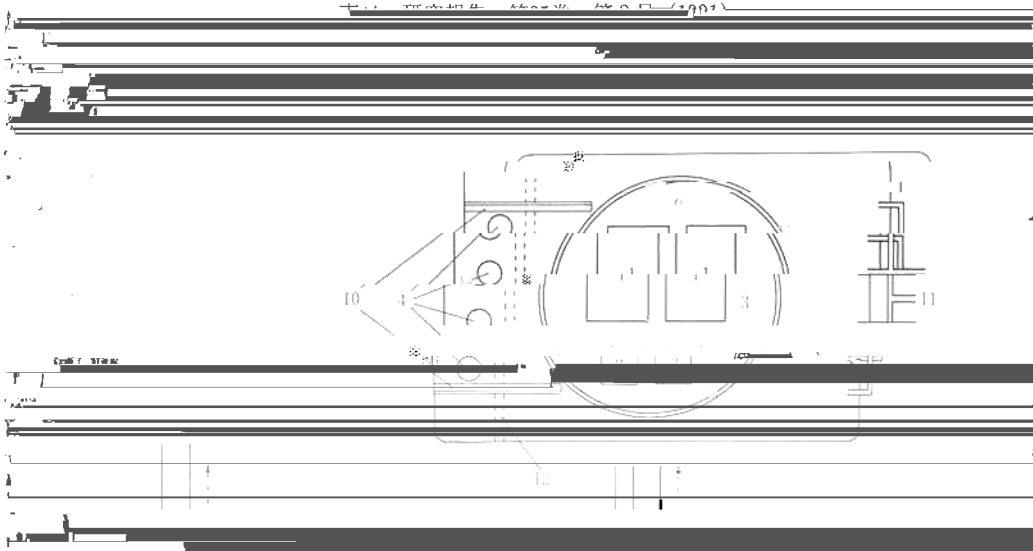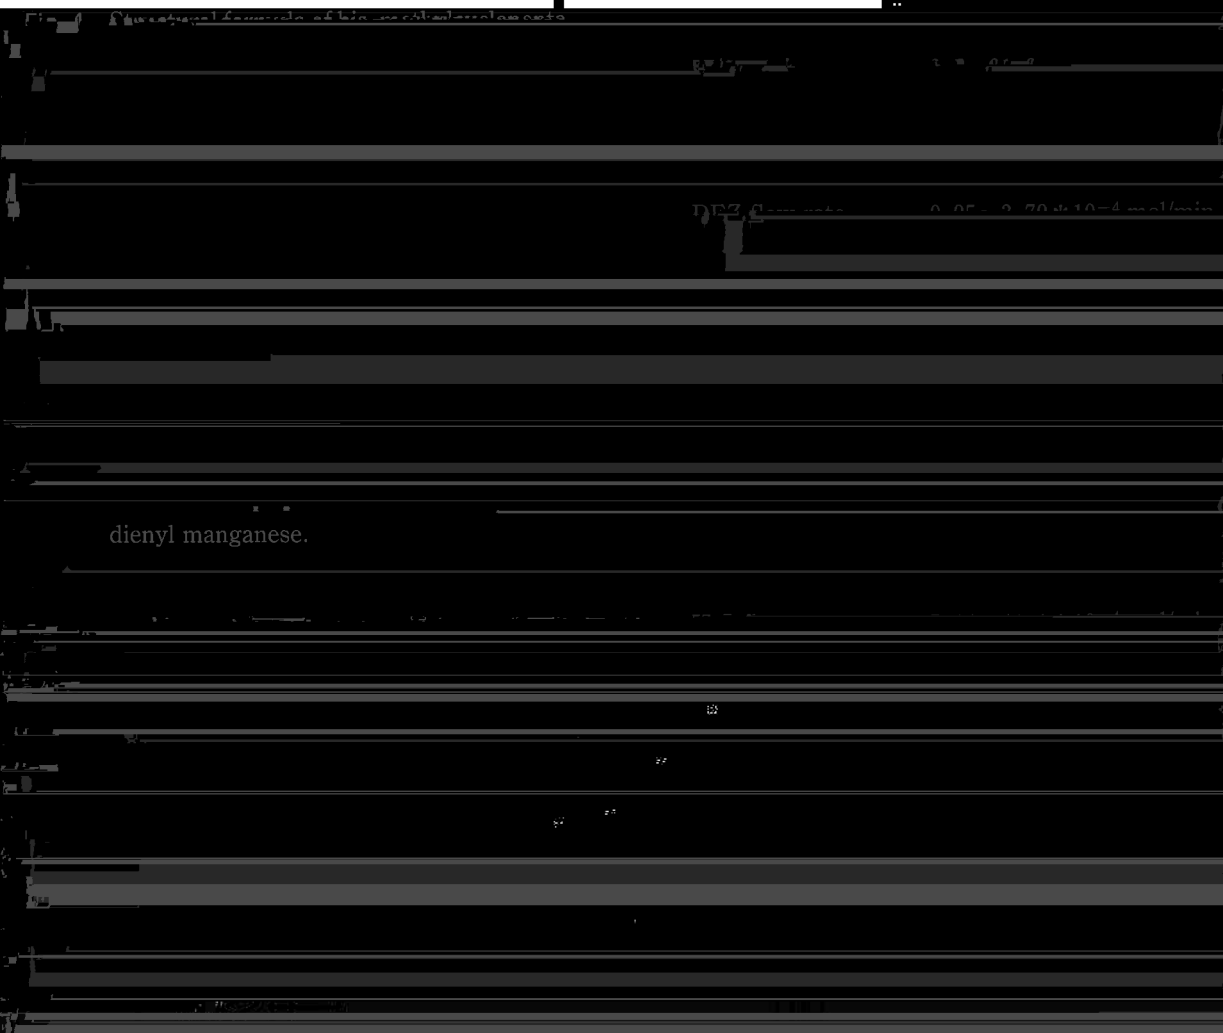

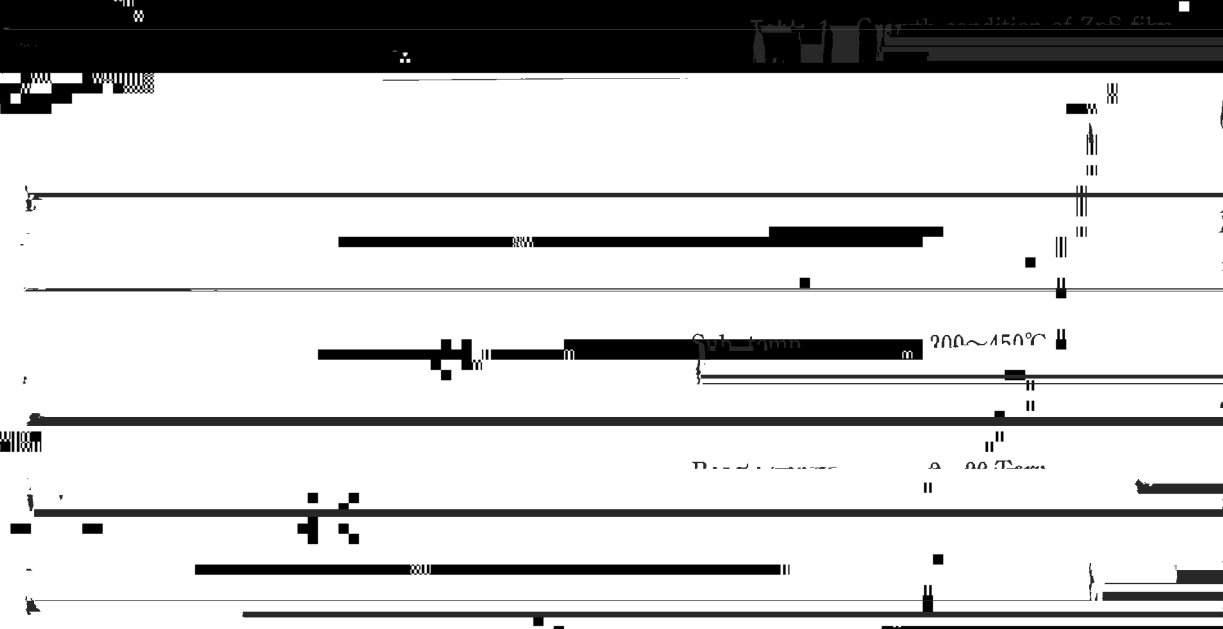

dienyl manganese.

Oscilloscope

2. 往 田 上 表 示

DEZ flow rate. ( $T_{sub}=350^{\circ}C$ ,  $P_w=10$   
Torr,  $V/I=5.4$ )

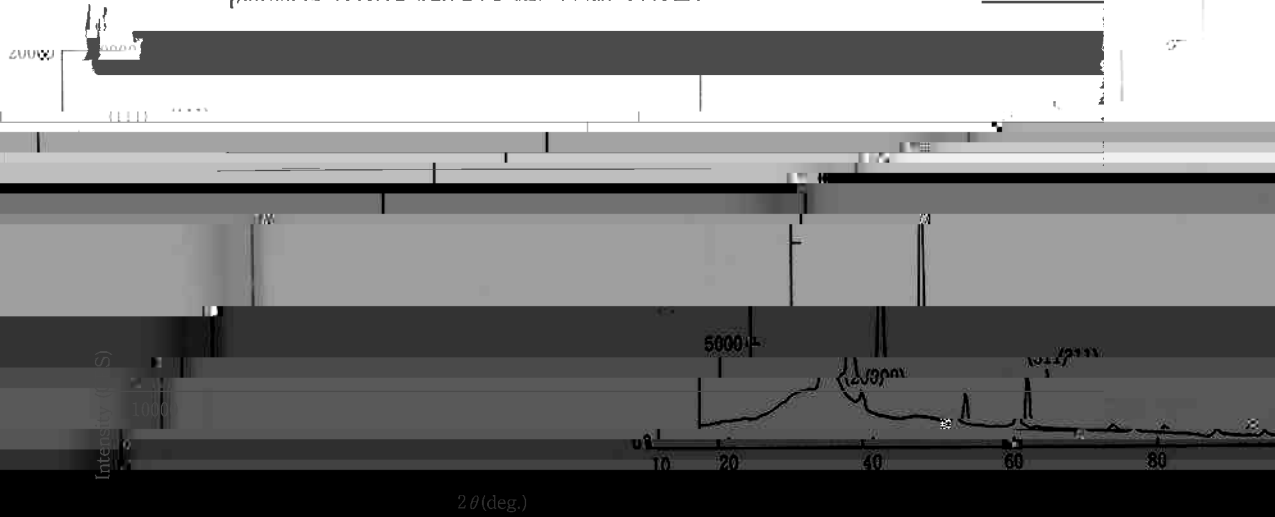


Fig. 9 X-ray diffraction spectra of ZnS film.

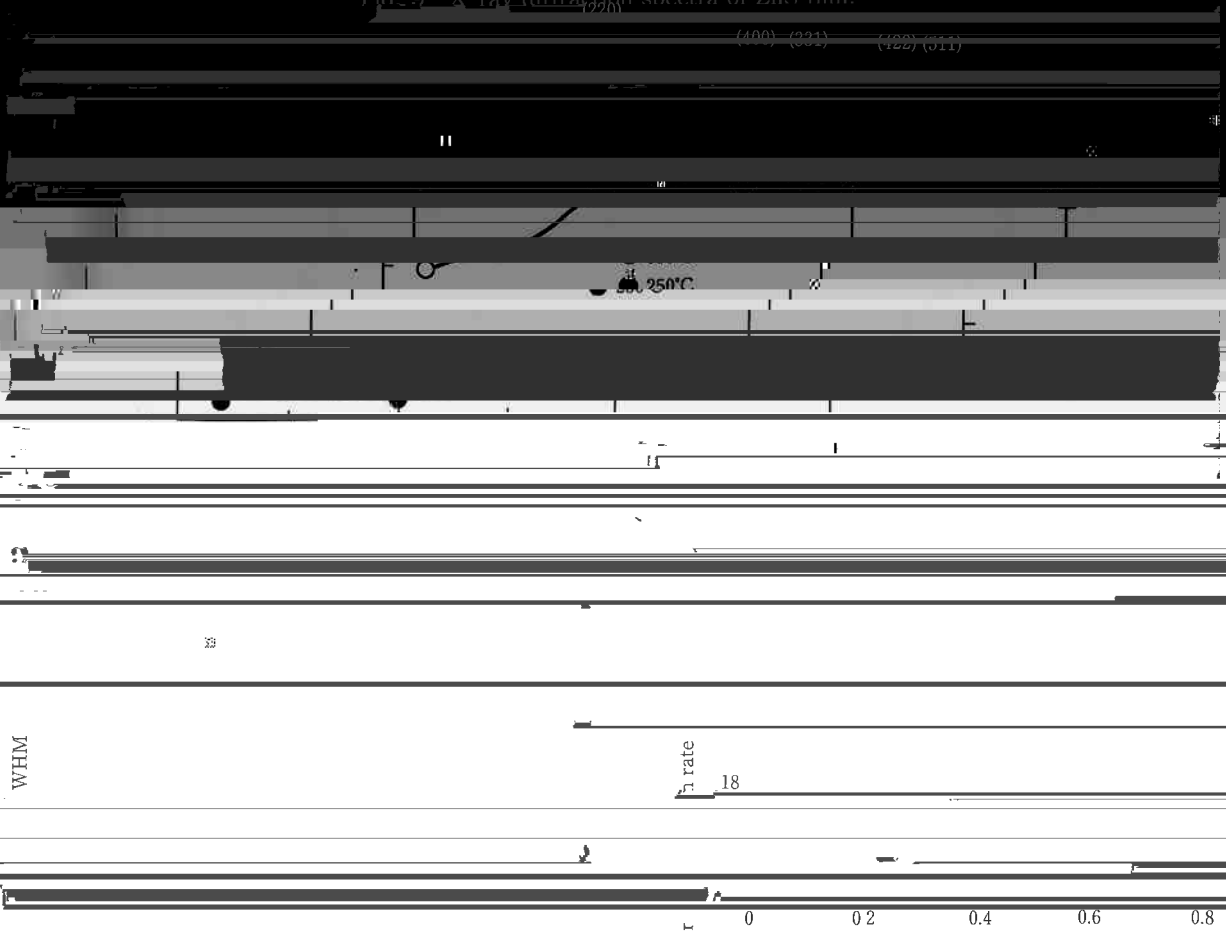


Fig. 10 FWHM of cubic (111) plane of ZnS film

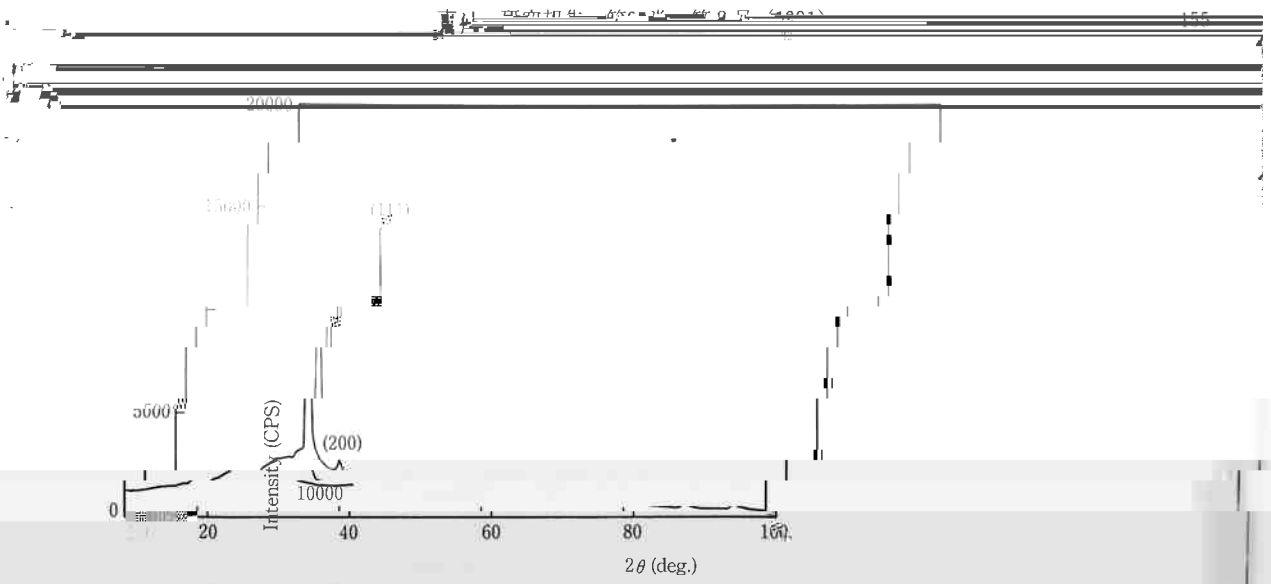
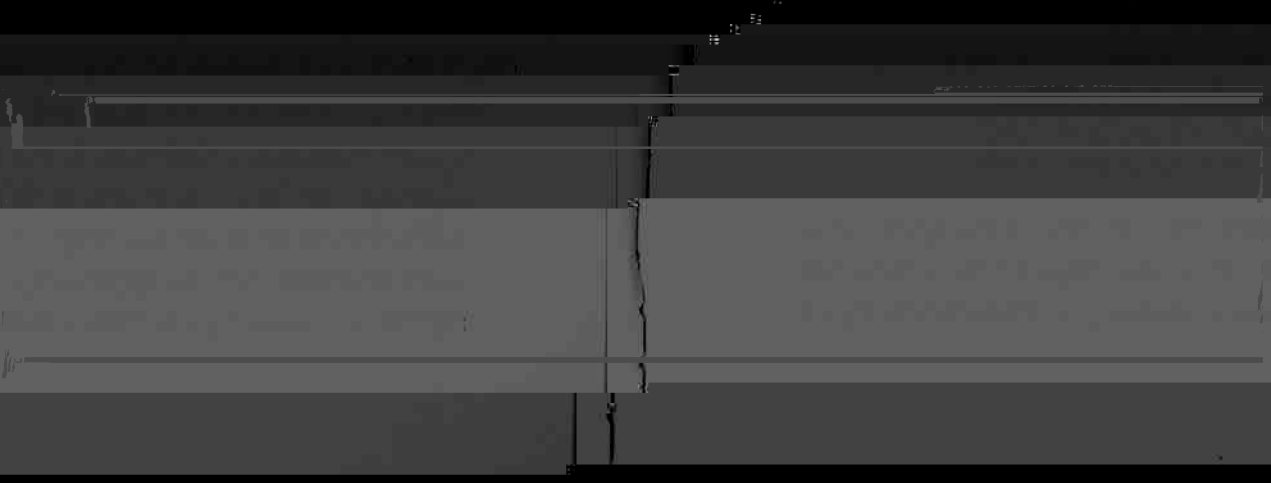
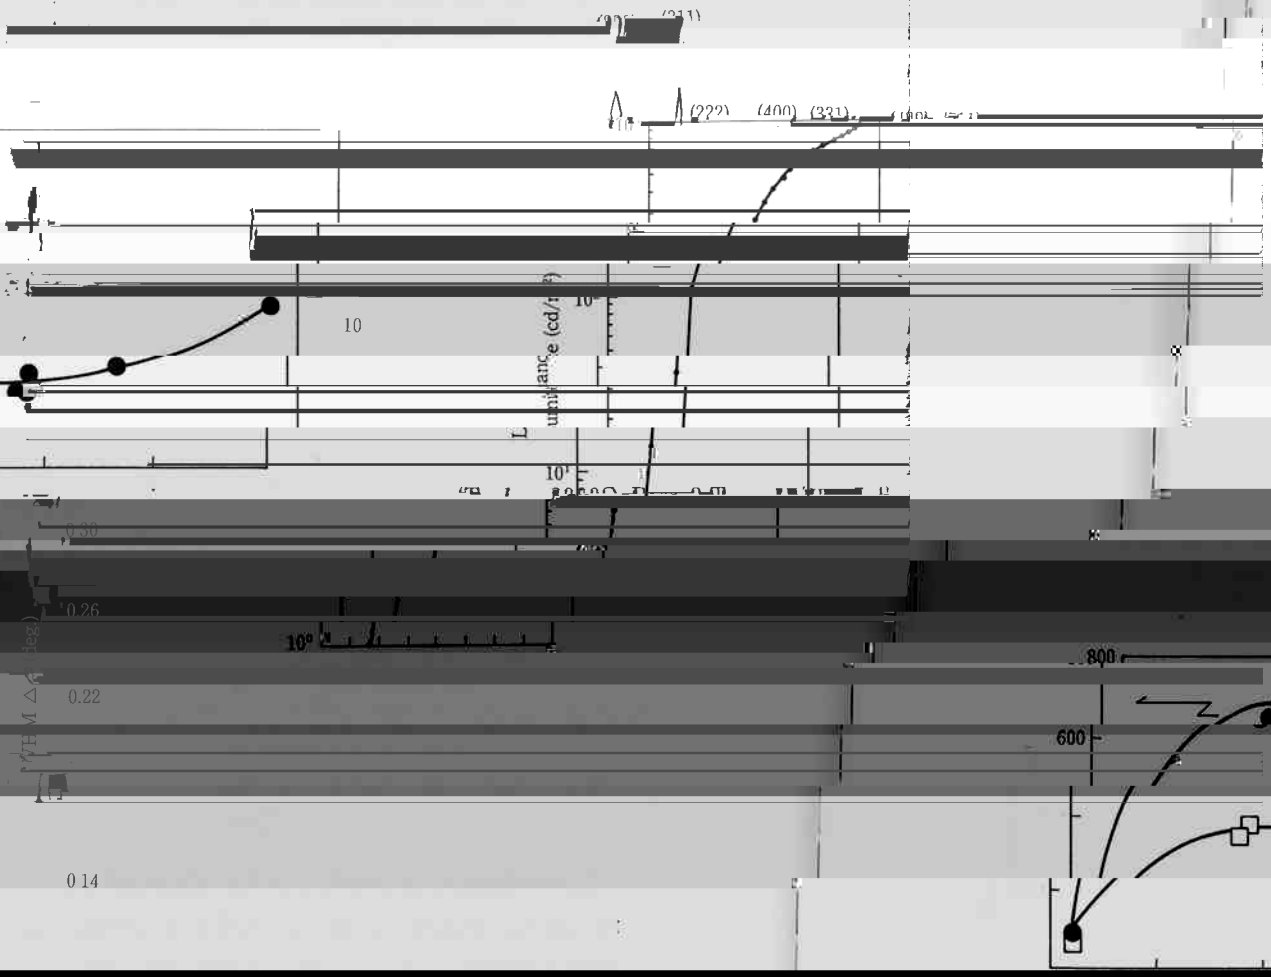


Fig. 10. X-ray diffraction pattern of ZnO film.



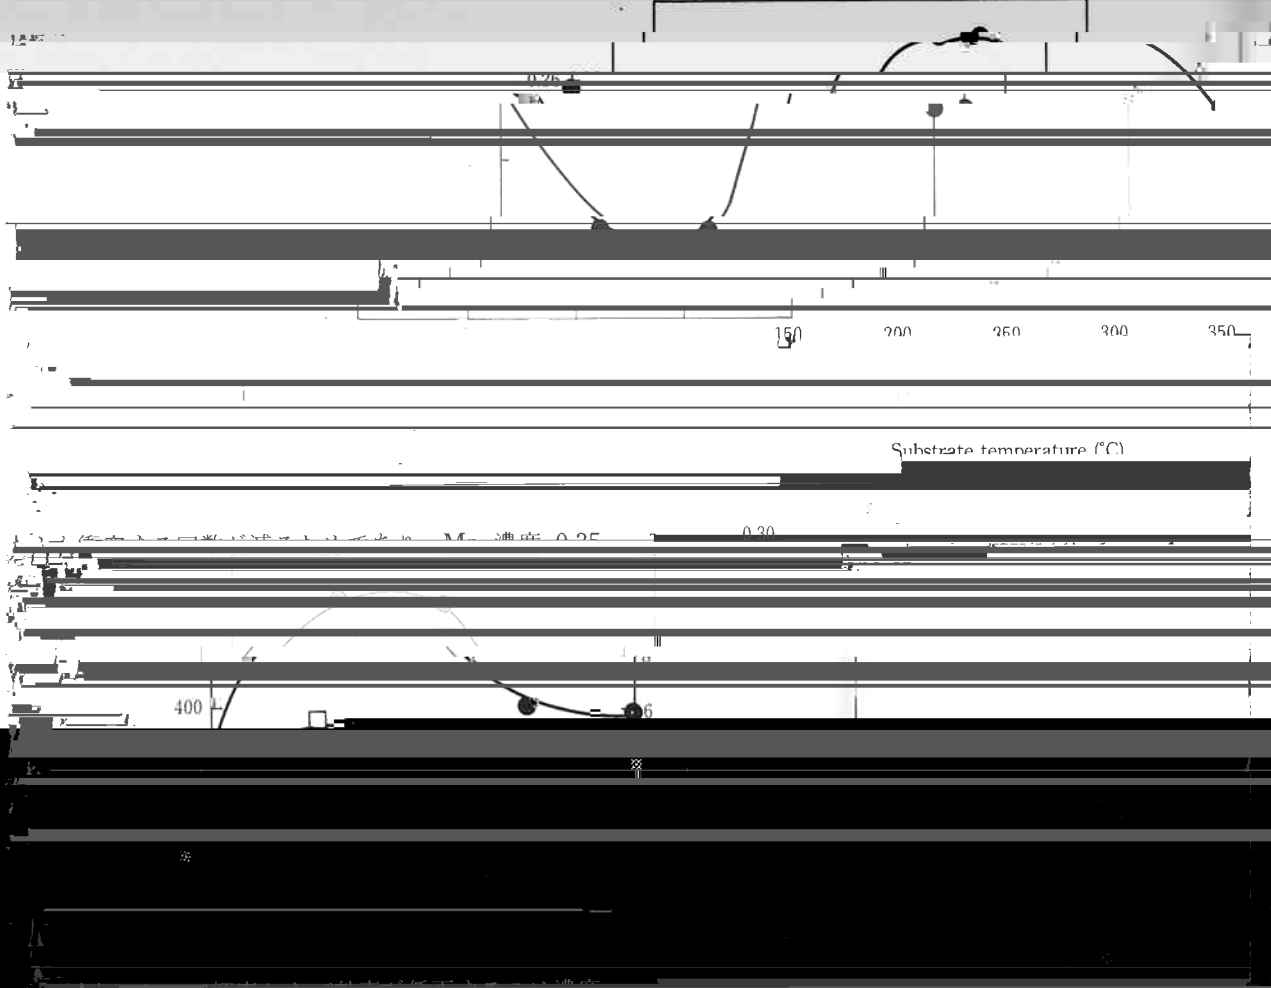


図 5.4 (a) (b) 温度分布を示すサンプルの印加

VI/II = 5.4





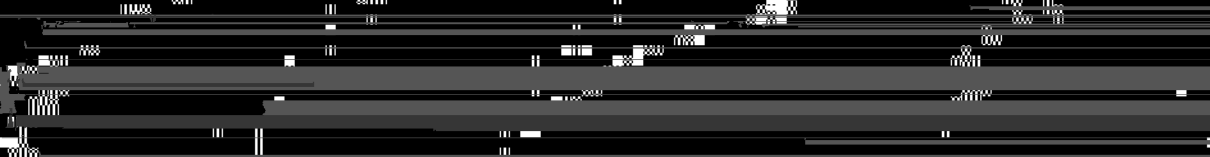


Table 5. FL characteristics of 5-in. -diagonal display

Item	Value
Viewing angle	160°
Contrast ratio	1000:1
Response time	16ms
Power consumption	1.5W
Threshold voltage	170 V <sub>0-10</sub>
Operating voltage	100 V <sub>0-10</sub>

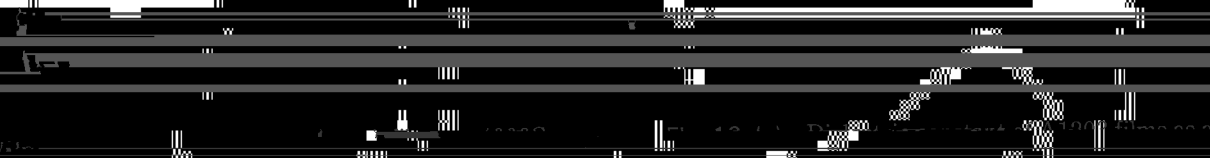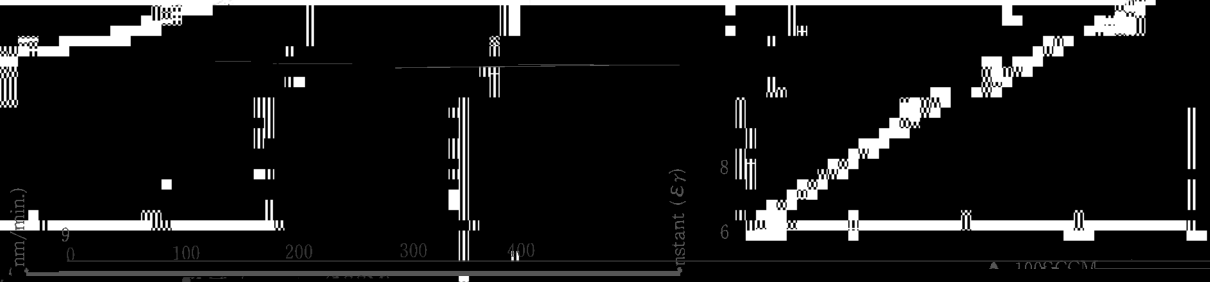