

る隙間腐食加速度係数に着目して調査を行った。



Fig. 1. A photograph of the cathode assembly used in the test.

Cooler

Fig. 2. A photograph of the cathode assembly after the test.

Stainless steel

Lugger capillary

Fig. 3. A photograph of the cathode assembly after the test.

Cathode

(a)

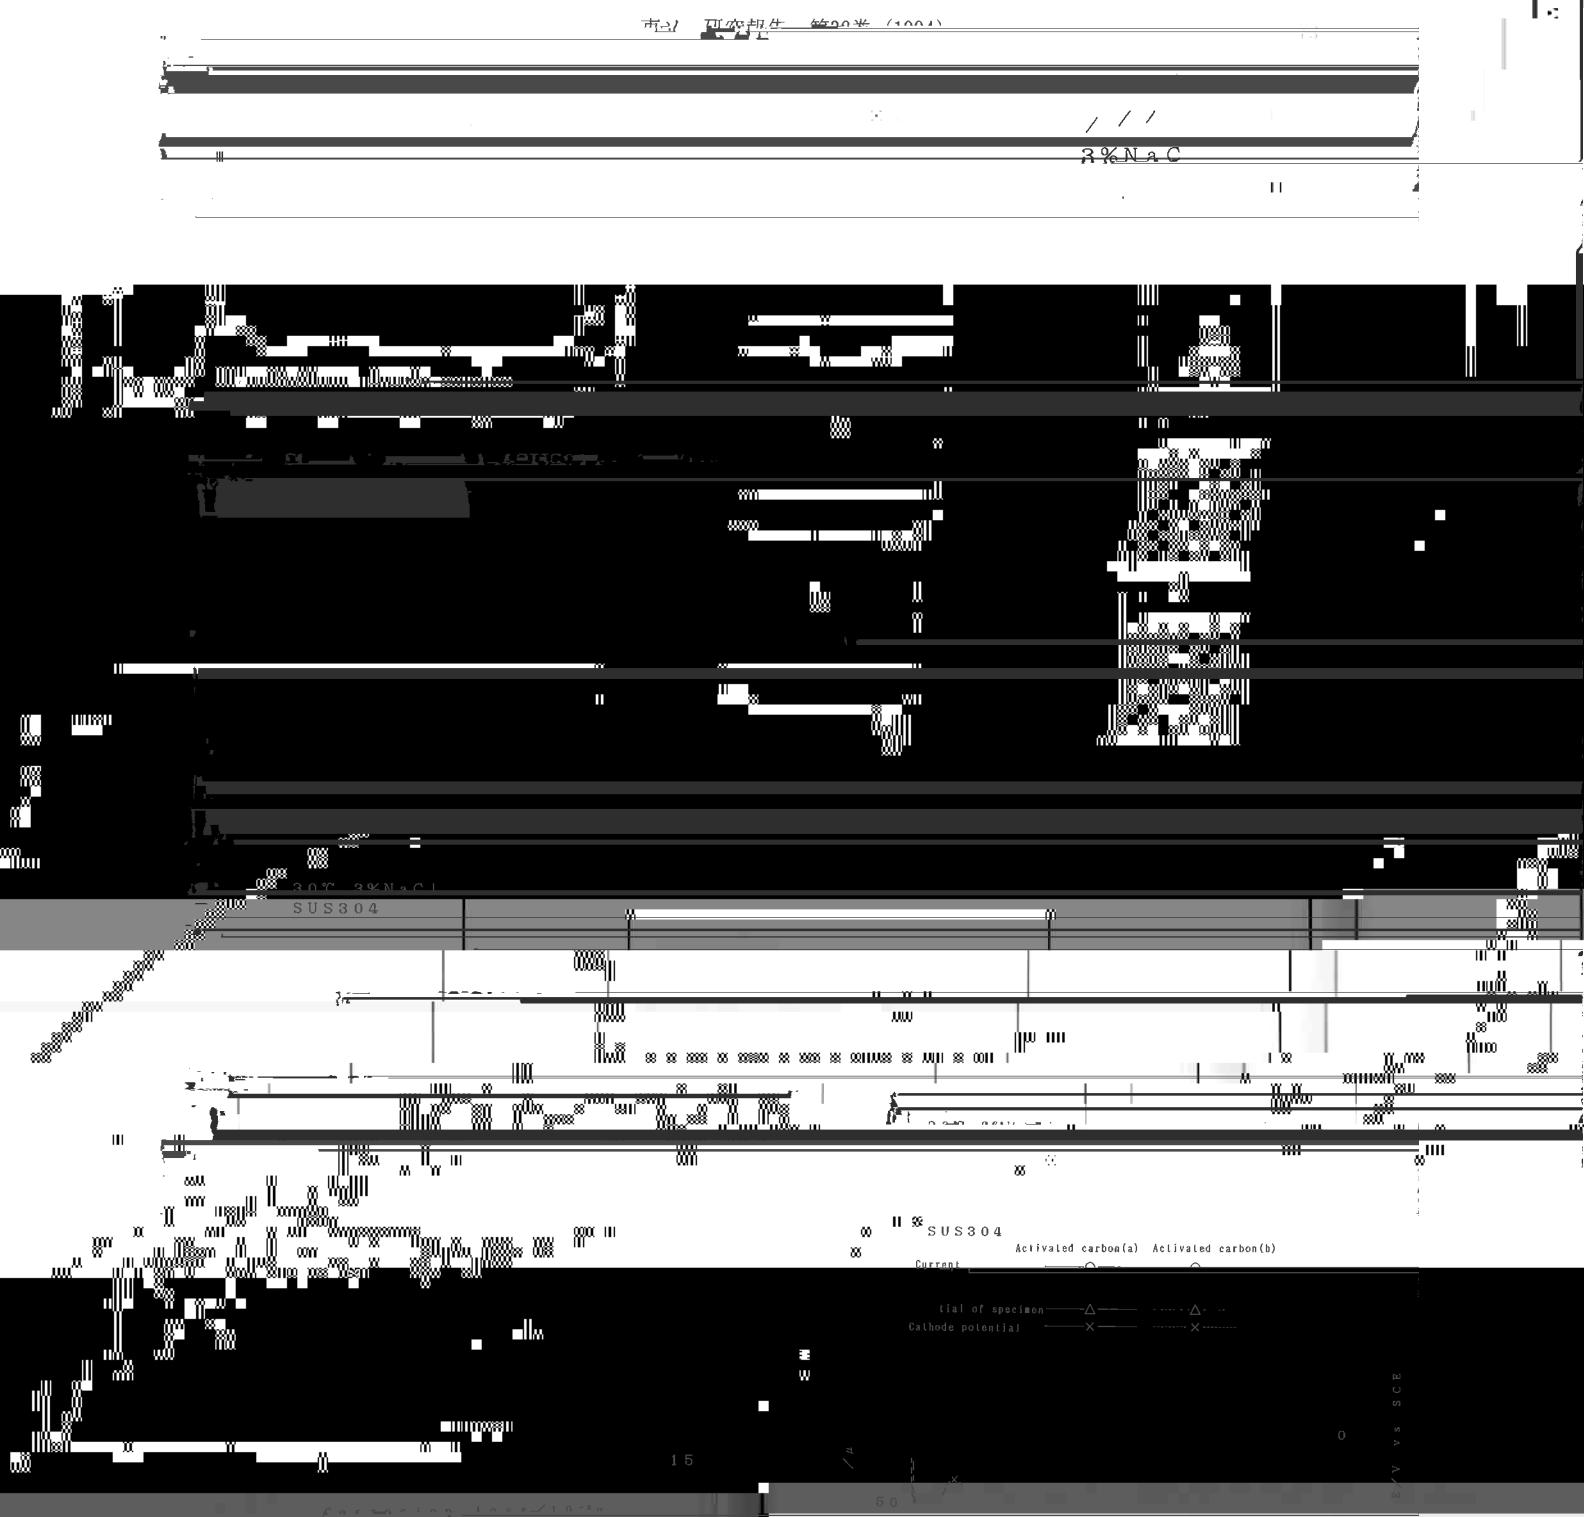
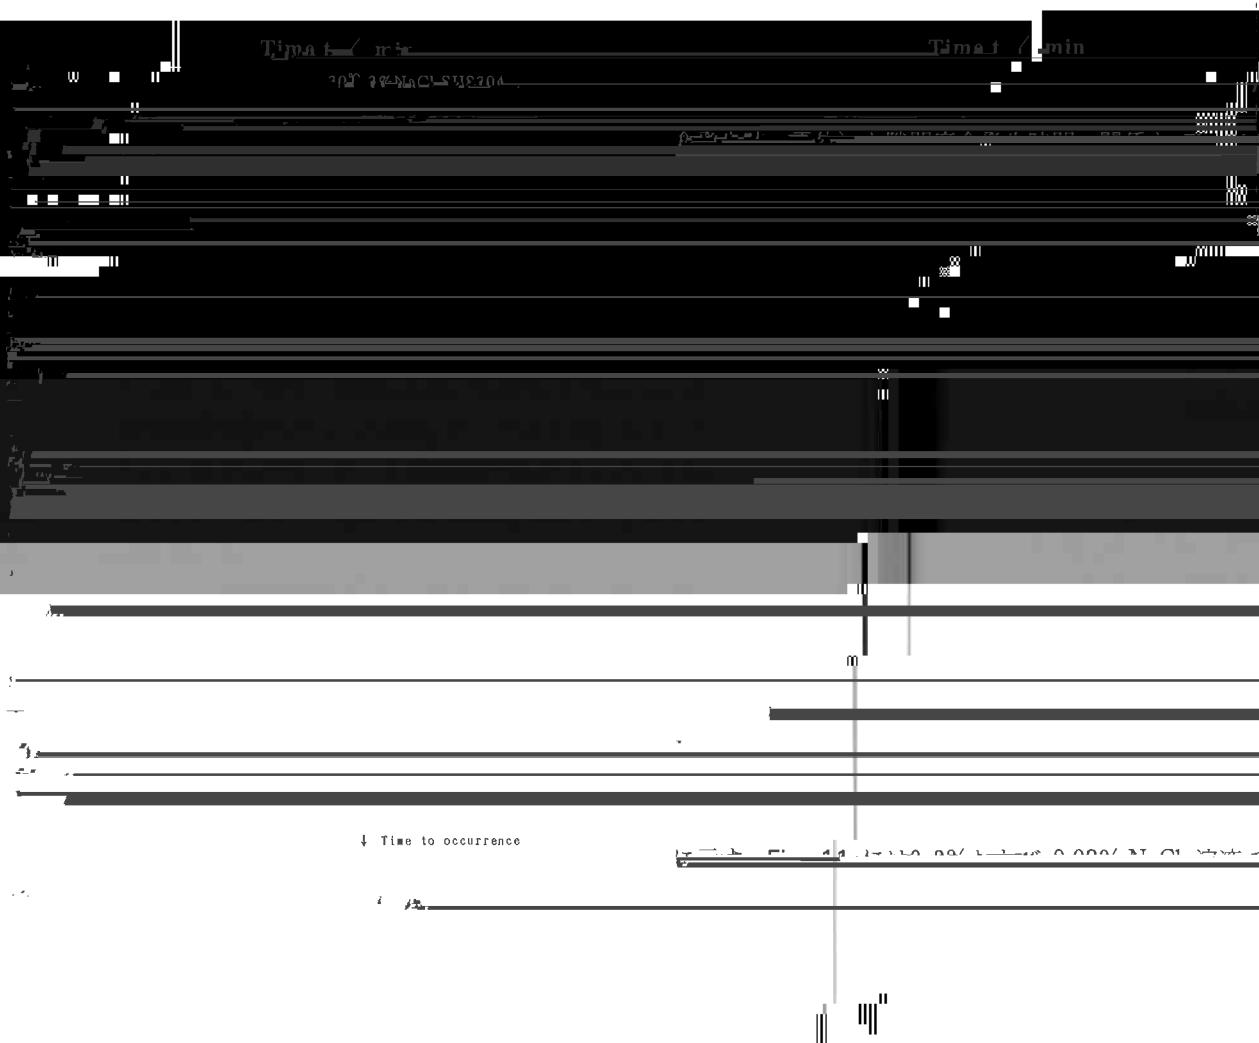
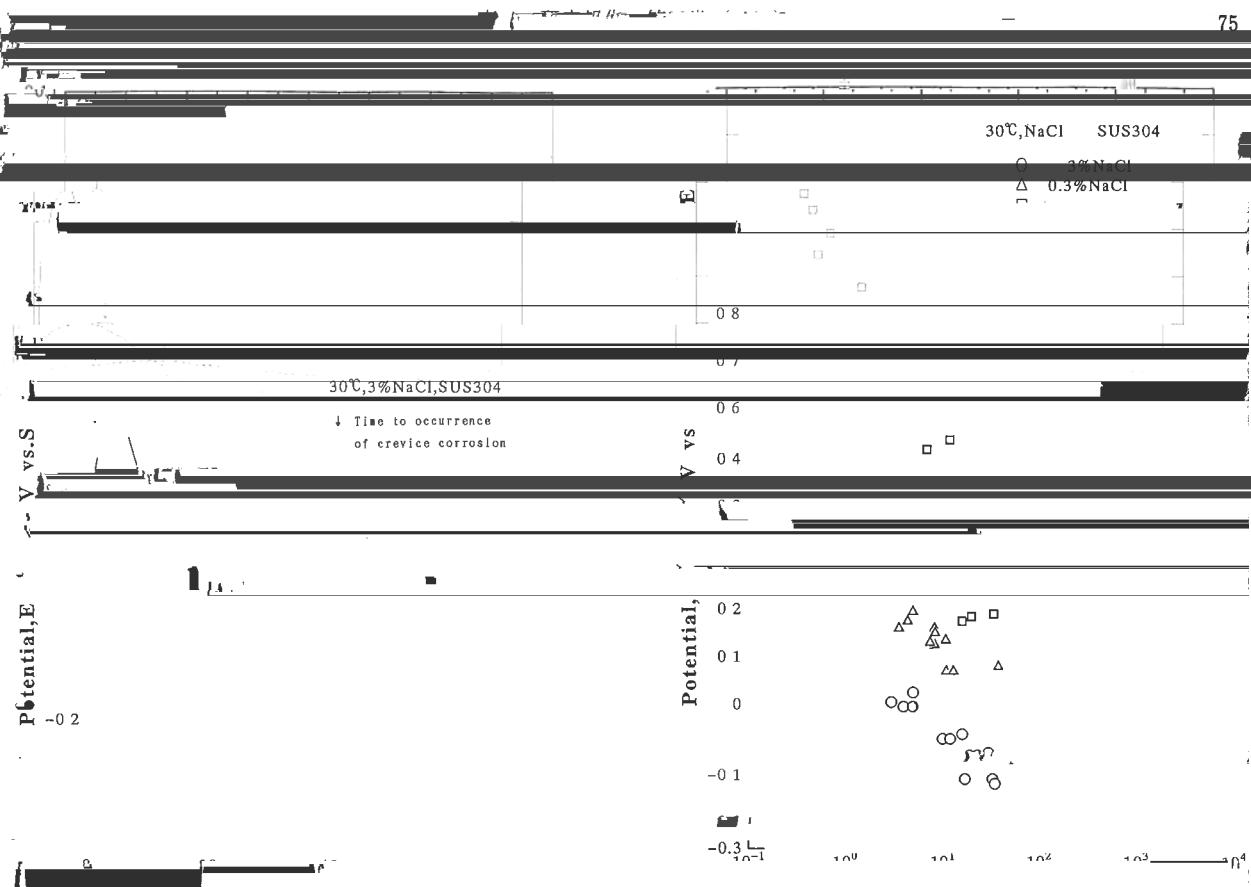


Figure 2. Log-log plot of  $\sigma$  versus  $E$ .

10°

D. J. L. i-bi transmural movement and cor.

erosion rate in 2% NaCl solution




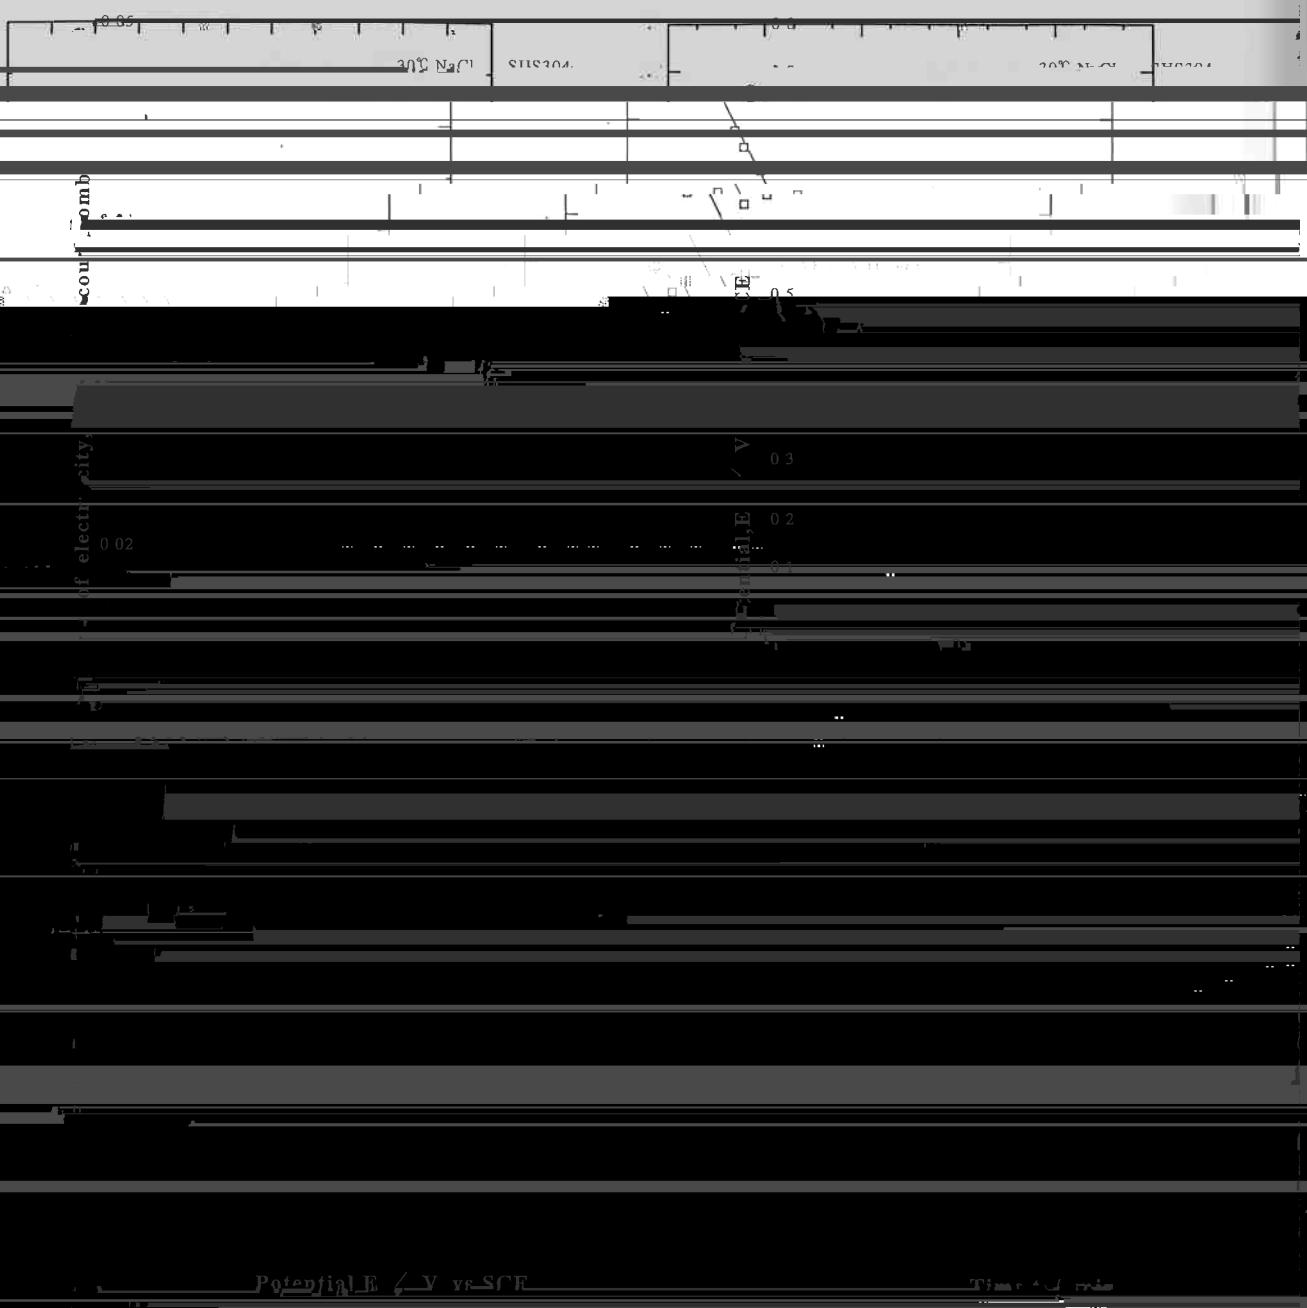


Fig. 12 Relationship between potential of

Fig. 14 Relationship between potential and time




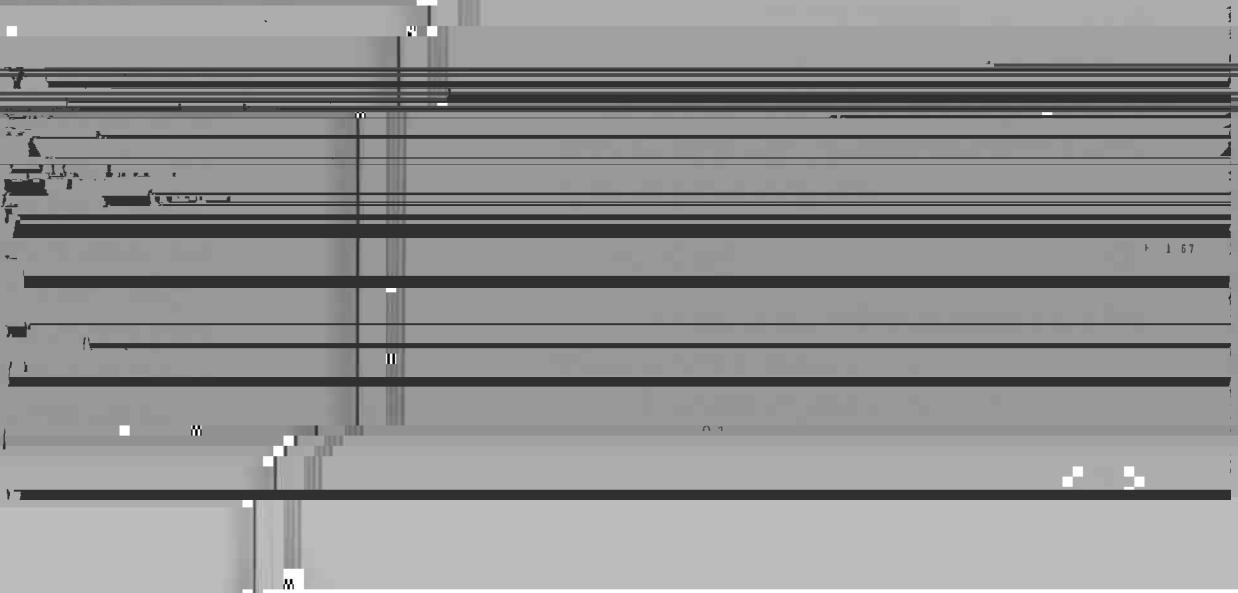

[REDACTED]

(1973) 30 396. (1974) 32 274. (1976) 37 608

(1981).

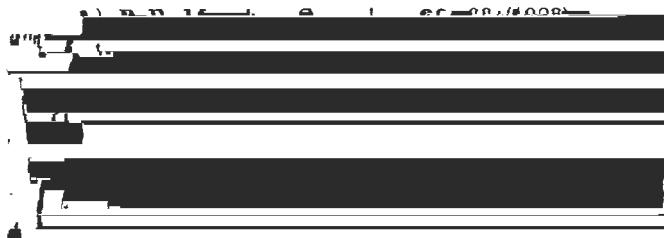

000

W

00

III

III